



OVER 8000 SPARKIES  
HAVE MADE THE SWITCH



## FL-E4MRB

Emergency Recessed Blade



### Features

- Recessed installation
- 3 hours emergency duration
- 24m viewing distance
- cut out: 380x70 mm
- IP20
- Built-in LiFePO4 battery, replaceable
- Maintained operation
- Intelligent charge and discharge

### Materials

- Panel: PMMA
- Legend: PC
- Housing: PC, 850°C glow wire test

### Standard Compliance

- AS2293.3
- AS 60598.2.22
- AS/NZS 60598.1
- AS CISPR 15
- IEC62133
- AS61347-2-7

### Accessories

N/A



AS2293


3H

LiFePO4

### Technical Specifications

Mains Supply	220-240 VAC ,50/60Hz
Power	4 W
Duration Time	3 Hours
Recharge Period	16 Hours
Battery Size & Type	LiFePO4 3.2V1.5Ah
LED Power	0.7 W (emergency) 1 W (maintained)
CCT	6500 K
CRI	70
Luminous Flux (with legend)	30 lm (emergency) 40 lm (maintained)
View Distance	24 m
Beam Angle	N/A
Protection Class	Class II
Operating Temperature	0-40 °C

### Photometric Datasheet

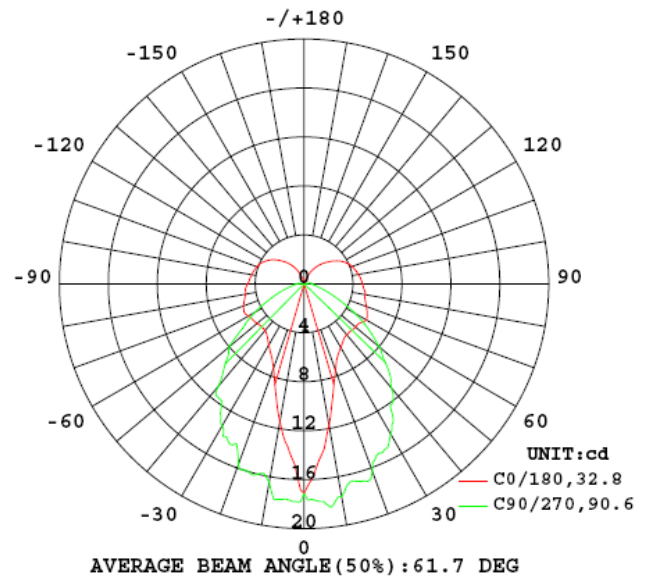

### Dimensions

