




SHOP SMART. SHOP VALUE  
SHOP *differently*



## Janus 200W Street Light 5000K with Photocell



- *ANSI C136.10-1996 Twist Lock*
- *Time Delay of 3-20 seconds*
- *Surge Arrester Built-In*
- *Photodiode Sensor*
- *Fail-On Mode*

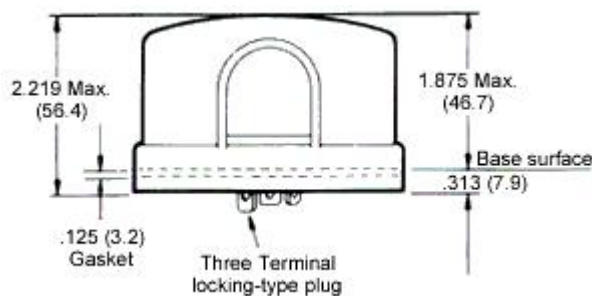

## Product Summary

The photocontroller JL-205 series is applicable to control the street lighting, garden lighting, passage lighting and doorway lighting automatically in accordance with the ambient natural lighting level.

This product is designed with electronic circuits with sensor of photodiode and a surge arrester (MOV) is provided. Its quicker response with time delay of 3-20 seconds offers easy-to-test feature. Especially, model JL-205C provides a wide voltage range for customer applications under almost power supplies.

Further, a preset 3-20 seconds time-delay might avoid mis-operation due to spotlight or lightning during the night time.


This product provides twist lock terminals meeting the requirements of ANSI C136.10-1996 and the Standard for Plug-In, Locking Type Photocontrols for Use with Area Lighting UL773, 4<sup>th</sup> Edition, dated Jan.19<sup>th</sup>, 1995,

## Technical Data

Model	JL-205A	JL-205B	JL-205C
Rated Voltage	110-120VAC	220~240VAC	110-277VAC
Applicable Voltage Range	100-140VAC	200~260VAC	105-305VAC
Rated Frequency	50/60Hz		
Rated Loading	1000W Tungsten, 1800VA Ballast		
Power Consumption	1.5VA		
On/Off Level	20Lx On 50Lx Off		
Ambient Temp.	-40°C ~ +70°C		
Related Humidity	99%		
Overall Size	84 (Dia.) x 66mm		
Weight Approx.	85 grs		

## Installation

Disconnect power; wire the receptacle according to the diagram in right hand. Push the photocontroller on and twist it clockwise to lock it into the receptacle. **Install the photocontroller with the Photocell facing the NORTH direction as indicated on the top of the photocontroller.** Adjust the receptacle position if necessary.

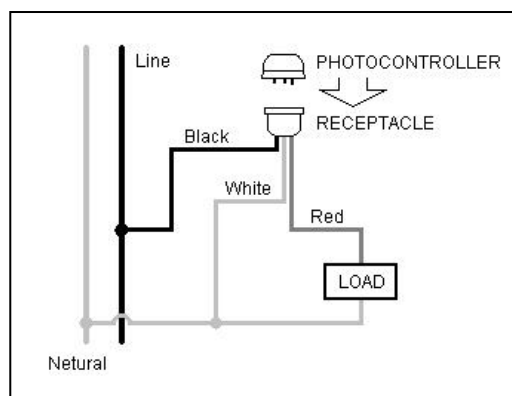

## Ordering Information

**\*JL-205C - \*\*12**

- \*. **Model Number;**
- \*\*. **MOV diameter in mm.**
- 12 = 110Jole / 3500Amp;
- 15 = 235Jole / 5000Amp;
- 23 = 460Jole / 7500Amp.



**MOORABBIN**  
131-133 Keys Road  
Moorabbin VIC 3189

**ALTONA**  
1 Drake Boulevard  
Altona VIC 3018

**ALBION**  
35 Sandgate Road  
Albion QLD 4010

**AUCKLAND**  
10 Fairfax Avenue, Penrose  
Auckland 1061, New Zealand

sales@jh.market  
www.jh.market  
sales@jhmarket.co.nz  
jhmarket.co.nz

AU National: 1300 000 808  
Queensland: 1300 000 707  
NZ National: 0800 748 848