


## Emerex Wall/Ceiling Slim Exits

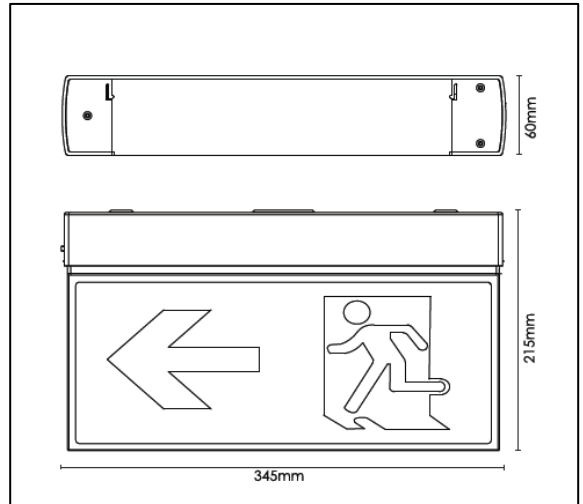

<b>MODEL</b>	CS-MRX-EXSB	<b>IK</b>	07
<b>LED BRAND</b>	Osram	<b>OPERATING TEMPERATURE (°C)</b>	0 – 40°C
<b>DRIVER BRAND</b>	SYNNOVATE	<b>MAINTAINED/NON-MAINTAINED OPERATION</b>	Maintained
<b>INPUT VOLTAGE (V)</b>	230V	<b>DIMMABLE</b>	NA
<b>POWER FACTOR (PF)</b>	0.95	<b>VIEWING (m)</b>	24
<b>WATTAGE (W)</b>	2W	<b>INSTALLATION TYPE</b>	Surface Mount – Wall / Ceiling
<b>FLICKER FREE</b>	YES	<b>CUT-OUT (mm)</b>	70 x 430
<b>LUMEN OUTPUT (LM)</b>	95.1LM	<b>DIMENSION (mm)</b>	345 x 215 x 60
<b>EFFICACY (LM/W)</b>	47.5LM/W	<b>NET WEIGHT (kg)</b>	1.5
<b>HOUSING COLOUR &amp; MATERIAL</b>	White, ABS	<b>LIFESPAN (Hours)</b>	50,000
<b>IP</b>	20	<b>WARRANTY (Years)</b>	3
<b>COMPLIANCE</b>	AS/NZS 2293, AS/NZS 60598, RCM		