



Low maintenance one box solution
Exit Light with advanced features for easy set up and reliable operation.

Features

- High performance LED technology
- Advanced Lithium batteries
- Maintained operation
- 24m viewing
- Slide and connect installation
- Wall or ceiling mountable
- Complete with running man inserts
- Single or double sided
- Low energy consumption
- Large terminal blocks
- Designed in accordance with AS/NZS 2293


Ordering Information

Part Number	Description	Box Quantity
MRX-EXSC	ALPHA LED Slide and Connect 24m Maintained Exit Light c/w Lithium Battery	10

Specifications

Input	Wiring	Lamp	Mode	Viewing	Battery	Autonomy	Mounting	IP	Compliance	Classification
230VAC 50Hz	Hardwired into terminal block	2W LED Strip 50,000 hours	Maintained	24m	LiFePO4	> 120 mins	Wall or ceiling, surface mount	IP20	RCM, AS/NZS 2293, AS/NZS 60598.1	C0 D3.2 C90 E2.5

Dimensions

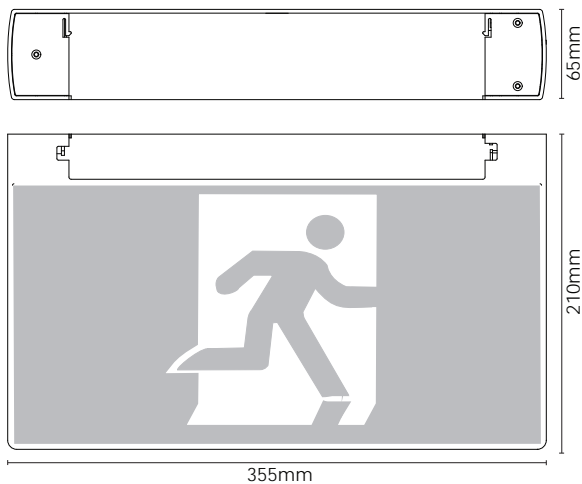

Length	Width	Height	Weight
355mm	65mm	210mm	1.2kg

Spacing Table and Mounting Heights

NATA Classification	MOUNTING HEIGHT			
	2.1m	2.4m	2.7m	3.0m*
C0 - D3.2	6.5	6.6	6.6	6.5
C90 - E2.5	5.6	5.8	5.8	6.0

* Maximum mounting height allowed is 2.7m but for exceptions see AS2293.1