




SHOP SMART. SHOP VALUE
SHOP *differently*



LAE Low UGR 15W Pure Aluminum LED Downlight 120mm

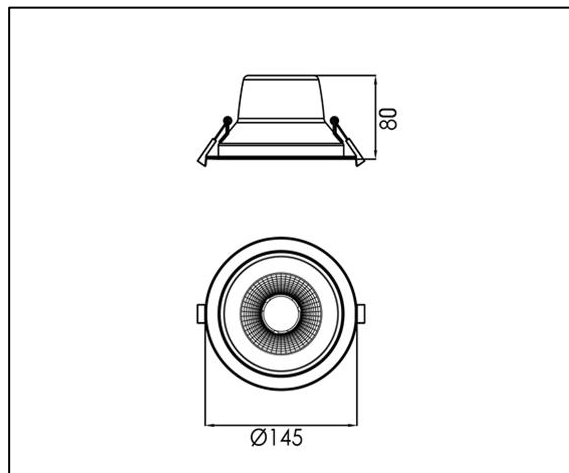

MODEL	CS-LAE-LG-15W-3000K CS-LAE-LG-15W-4000K CS-LAE-LG-15W-5000K	UGR	<19
INPUT VOLTAGE (V)	220-240	HOUSING COLOUR	MATT WHITE
PROTECTION CALSS	II	MATERIAL	PURE ALUMINUM
IC RATED	CA90	IP	20
POWER FACTOR (PF)	>0.85	OPERATING TEMPERATURE (° C)	-20°Cto +45°C
WATTAGE (W)	15	DIMMABLE (Y/N)	Y
FLICKER FREE (Y/N)	Y	DIMMING TYPE	TRIAC DIMMING
LUMEN OUTPUT (LM)	1350	CUT-OUT (mm)	Φ120-135mm
EFFICACY (LM/W)	90	DIMENSION (mm)	Φ145*80mm
COLOUR TEMPERATURE (K)	3000	NET WEIGHT (kg)	0.18
BEAM ANGLE (°)	50	LIFESPAN (hr.) @L70B50	50000
CRI (Ra)	>80	WARRANTY (yr.)	5
SDCM	<5	COMPLIANCE	SAA



MOORABBIN

131-133 Keys Road
Moorabbin VIC 3189

ALTONA

1 Drake Boulevard
Altona VIC 3018

ALBION

35 Sandgate Road
Albion QLD 4010

AUCKLAND

10 Fairfax Avenue, Penrose
Auckland 1061, New Zealand

sales@jh.market

www.jh.market

sales@jhmarket.co.nz

jhmarket.co.nz

AU National: 1300 000 808

Queensland: 1300 000 707

NZ National: 0800 748 848

Yiyun Corporation Pty Ltd | All information in this catalogue is subject to change at business discretion.

Please contact the office for confirmation of pricing and stock availability at time of order