


Rafe 40W Track Light WH

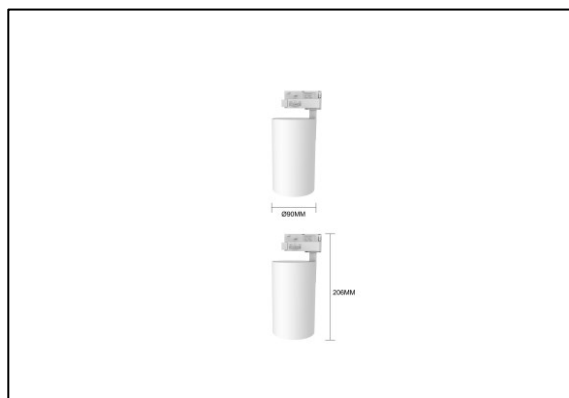

MODEL	CS-CGD-LR1023R-01-40W-3000K-38D-WH CS-CGD-LR1023R-01-40W-4000K-38D-WH CS-CGD-LR1023R-01-40W-5000K-38D-WH	SDCM	<6
LED BRAND	Bridgelux	UGR	<19
INPUT VOLTAGE (V)	220-240V	HOUSING COLOUR	WHITE
PROTECTION CALSS	CLASS I	MATERIAL	ALUMINUM
IC-4 RATED (Y/N)	YES	IP	20
POWER FACTOR (PF)	0.9	OPERATING TEMPERATURE (°C)	-20°C to +40°C
WATTAGE (W)	40W	DIMMABLE (Y/N)	NO
FLICKER FREE (Y/N)	YES	DIMMING TYPE	NA
LUMEN OUTPUT (LM)	3600LM	INSTALLATION TYPE	4 PHASE 3 CIRCUIT UNIVERSAL TRACK
EFFICACY (LM/W)	90LM/W	CUT-OUT (mm)	90mm
COLOUR TEMPERATURE (K)	3000K / 4000K / 5000K	DIMENSION (mm)	SEE DIMENSION DRAWING
BEAM ANGLE (°)	38°	NET WEIGHT (kg)	0.9kg
ANGLE OF ROTATION	350° HORIZONTALLY ROTATION, 45° DOWNWARDS and 18° UPWARDS	LIFESPAN (hr.) @L70B50	50,000 HR
CRI (Ra)	90	WARRANTY (yr.)	3 YEARS
SDCM	<6	COMPLIANCE	SAA