


Emerex RBlade LED Exit Light Black

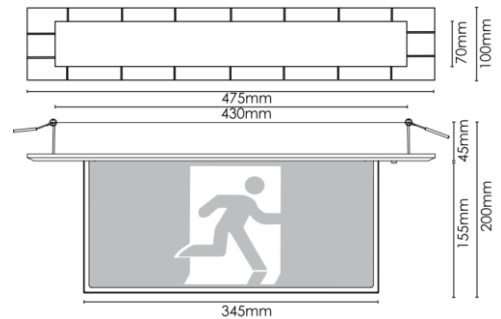

MODEL	CS-MRX-EXRB/B	VOLTAGE	AC 230V; 50Hz
INSTALLATION	Complete with 1.2m flex cable & plug	LIGHT SOURCE	High efficacy LED strip, 50,000 hours
MODE OF OPERATION	Maintained	POWER CONSUMPTION	4W (standby)
EMERGENCY DURATION	>120 min.	CHARGER	Intelligent 3-stage charge with battery management system
PROTECTION	Overcharge, low voltage disconnect, overcurrent, short circuit	TESTING FACILITY	Manual test switch
INDICATORS	Battery charger green LED	CONSTRUCTION	Flame-retardant polycarbonate
MOUNTING	Recessed mounted L430 x W75 mm cut-out	DIFFUSER	All variations of Running Man pictogram
DIMENSION	L345 x W75 x H220 mm	IP RATING	IP20
WEIGHT	1.5 Kg	WARRANTY	3 Years
OPERATING TEMPERATURE	1 to 40°C	RELATIVE HUMIDITY	0 to 95%
STANDARDS	RCM/EMC, AS/NZS 2293, AS/NZS 60598.1	AN/NZS 2293 CLASSIFICATION	C0 D6.3 C90 E3.2

SPACING TABLE	MOUNTING HEIGHT (M)		
NATA CLASSIFICATION	2.1	2.4	2.7
C0-D6.3	8.6	8.8	9.0
C90-E3.2	6.0	6.2	6.6