


Rafe 24W Surface Mount Downlight IP65 WH

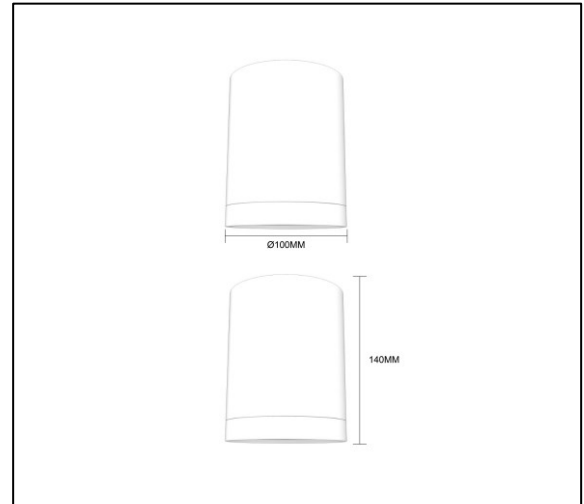

MODEL	CS-CGD-LC1517R-01-24W-3000K-60D-IP65-WH CS-CGD-LC1517R-01-24W-4000K-60D-IP65-WH CS-CGD-LC1517R-01-24W-5000K-60D-IP65-WH	UGR	<19
LED BRAND & TYPE	Bridgelux COB	HOUSING COLOUR	WHITE
INPUT VOLTAGE (V)	220-240V, 50/60Hz	MATERIAL	ALUMINUM
PROTECTION CALSS	CLASS I	IP	IP65
IC-4 RATED (Y/N)	YES	IK	NA
POWER FACTOR (PF)	0.9	OPERATING TEMPERATURE (°C)	-20°C to +40°C
WATTAGE (W)	24W	DIMMABLE (Y/N)	Yes
FLICKER FREE (Y/N)	YES	DIMMING TYPE	Traic-dimming
LUMEN OUTPUT (LM)	2160LM	INSTALLATION TYPE	SURFACE MOUNTED
EFFICACY (LM/W)	90LM/W	DIMENSION (mm)	Ø100 x H140 mm
COLOUR TEMPERATURE (K)	3000K / 4000K / 5000K	NET WEIGHT (kg)	1.1kg
BEAM ANGLE (°)	60°	LIFESPAN (hr.) @L70B50	50,000 HR
CRI (Ra)	90	WARRANTY (yr.)	3 YEARS
SDCM	<3	COMPLIANCE	SAA