


Rafe 9W Surface Mount Downlight IP65 BK

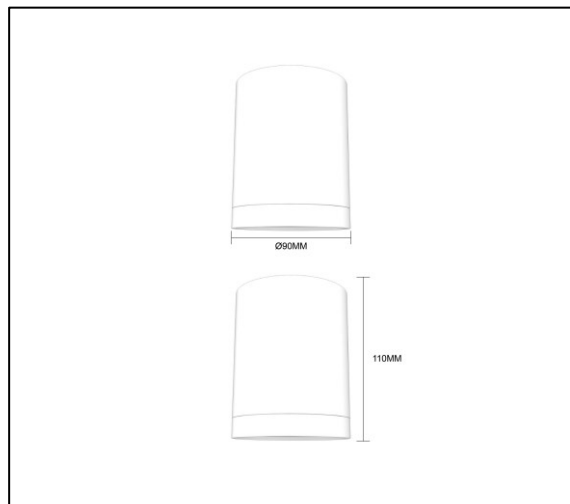

MODEL	CS-CGD-LC1516R-01-9W-3000K-60D-IP65-BK CS-CGD-LC1516R-01-9W-4000K-60D-IP65-BK CS-CGD-LC1516R-01-9W-5000K-60D-IP65-BK	UGR	<19
LED BRAND & TYPE	CREE COB	HOUSING COLOUR	BLACK
INPUT VOLTAGE (V)	220-240V; 50/60Hz	MATERIAL	ALUMINUM
PROTECTION CALSS	CLASS I	IP	IP65
IC-4 RATED (Y/N)	YES	IK	NA
POWER FACTOR (PF)	0.9	OPERATING TEMPERATURE (°C)	-20°C to +40°C
WATTAGE (W)	9W	DIMMABLE (Y/N)	Yes
FLICKER FREE (Y/N)	YES	DIMMING TYPE	Traic-dimming
LUMEN OUTPUT (LM)	810LM	INSTALLATION TYPE	SURFACE MOUNTED
EFFICACY (LM/W)	90LM/W	DIMENSION (mm)	Ø90 x H110 mm
COLOUR TEMPERATURE (K)	3000K / 4000K / 5000K	NET WEIGHT (kg)	0.6kg
BEAM ANGLE (°)	60°	LIFESPAN (hr.) @L70B50	50,000 HR
CRI (Ra)	90	WARRANTY (yr.)	3 YEARS
SDCM	<3	COMPLIANCE	SAA