


Emerex Wall Flood Light Emergency Fitting

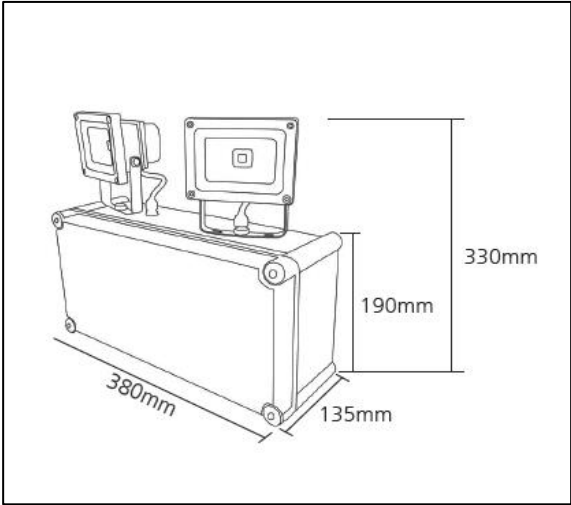

MODEL	CS-MRX-EMWP210F	HOUSING COLOUR & MATERIAL	White, Polycarbonate
LED BRAND	Bridgelux	IP	65
DRIVER BRAND	SYNNOVATE	IK	09
INPUT VOLTAGE (V)	230V	OPERATING TEMPERATURE (°C)	0 – 40°C
POWER FACTOR (PF)	0.95	MAINTAIN/NON-MAINTAIN OPERATION	Switchable in between
WATTAGE (W)	2x10W	DIMMABLE	NA
FLICKER FREE	YES	INSTALLATION TYPE	Surface Mount – Wall
LUMEN OUTPUT (LM)	2,000LM	DIMENSION (mm)	380 x 135 x 330
EFFICACY (LM/W)	100LM/W	NET WEIGHT (kg)	2.5
COLOUR TEMPERATURE	6500K	LIFESPAN (Hours)	50,000
BEAM ANGLE (°)	120°	WARRANTY (Years)	3
CRI (Ra)	84	COMPLIANCE	AS/NZS 2293, AS/NZS 60598, RCM