
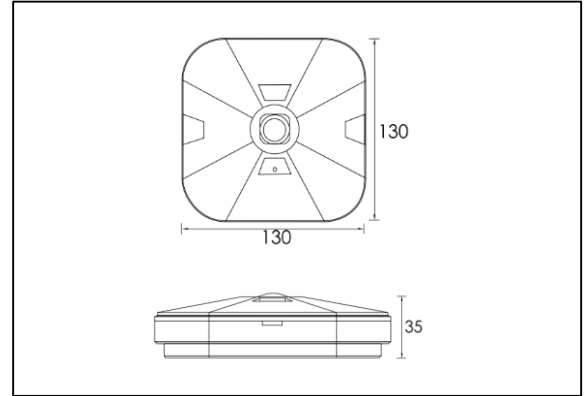


## Emerex Premium Surface Mounted Spitfire Black

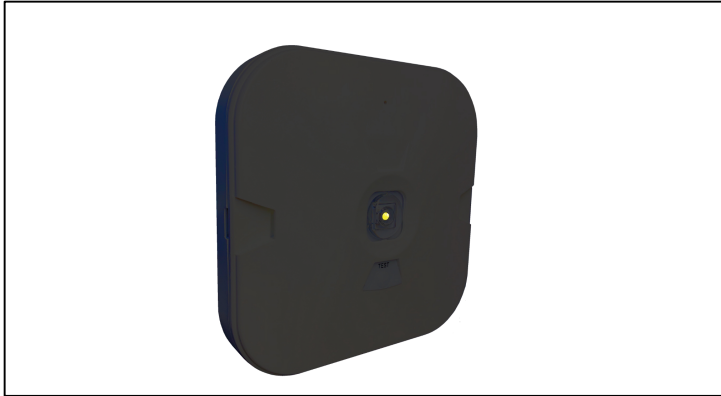

<b>MODEL</b>	CS-MRX-EMSMD63-BK	<b>VOLTAGE</b>	AC 230V; 50Hz
<b>INSTALLATION</b>	Terminal block, 20mm <sup>2</sup> cable entry	<b>LIGHT SOURCE</b>	High performance 4W LED with optical lens
<b>MODE OF OPERATION</b>	Non-maintained	<b>POWER CONSUMPTION</b>	2W (standby)
<b>EMERGENCY DURATION</b>	>120 min.	<b>CHARGER</b>	16hr intelligent 3-stage charge with battery management system
<b>PROTECTION</b>	Overcharge, low voltage disconnect, overcurrent, short circuit	<b>TESTING FACILITY</b>	Manual test switch
<b>INDICATORS</b>	Battery charger green LED	<b>CONSTRUCTION</b>	Flame-retardant polycarbonate
<b>MOUNTING</b>	Surface mounted	<b>CUT-OUT</b>	NA
<b>DIMENSION</b>	L130 x W130 x H35 mm	<b>IP RATING</b>	IP44
<b>WEIGHT</b>	1.0 Kg	<b>WARRANTY</b>	3 Years
<b>OPERATING TEMPERATURE</b>	1 to 40°C	<b>RELATIVE HUMIDITY</b>	0 to 95%
<b>STANDARDS</b>	RCM/EMC, AS/NZS 2293, AS/NZS 60598.1	<b>AN/NZS 2293 CLASSIFICATION</b>	C0 D63 C90 D63

SPACING TABLE	MOUNTING HEIGHT (M)								
NATA CLASSIFICATION	2.1	2.4	2.7	3.0	4.0	5.0	6.0	8.0	10.0
C0-D63	19.4	20.3	21.1	21.8	23.7	25.2	26.4	28.1	28.9
C90-D63	19.4	20.3	21.1	21.8	23.7	25.2	26.4	28.1	28.9