


Emerex Premium Surface Mounted Spitfire

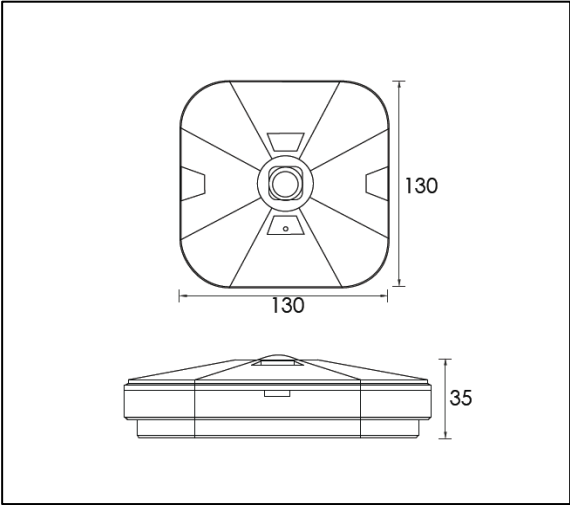

MODEL	CS-MRX-EMSMD63	HOUSING COLOUR & MATERIAL	White, ABS
LED BRAND	Osram	IP	65
DRIVER BRAND	SYNNOVATE	IK	07
INPUT VOLTAGE (V)	230V	OPERATING TEMPERATURE (°C)	0 – 40°C
POWER FACTOR (PF)	0.95	MAINTAIN/NON-MAINTAIN OPERATION	Non-maintained
WATTAGE (W)	5W	EMERGENCY CLASSIFICATION	D63
FLICKER FREE	YES	DIMMABLE	NA
LUMEN OUTPUT (LM)	>485LM	INSTALLATION TYPE	Surface Mount – Ceiling
EFFICACY (LM/W)	97LM/W	DIMENSION (mm)	130 x 130 x 35
COLOUR TEMPERATURE	6500K	NET WEIGHT (kg)	0.5
BEAM ANGLE (°)	170°	LIFESPAN (Hours)	50,000
CRI (Ra)	84	WARRANTY (Years)	3
COMPLIANCE		AS/NZS 2293, AS/NZS 60598, RCM	