
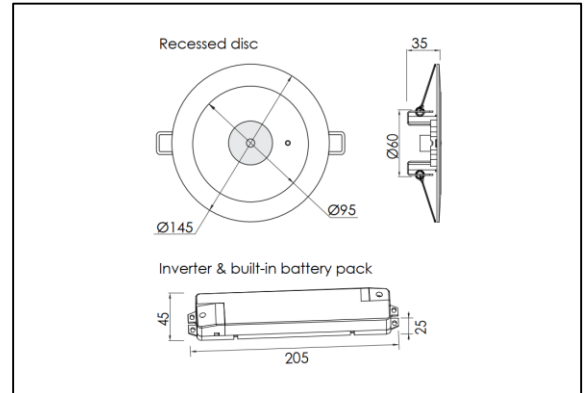


Emerex Premium Recessed Spitfire Black

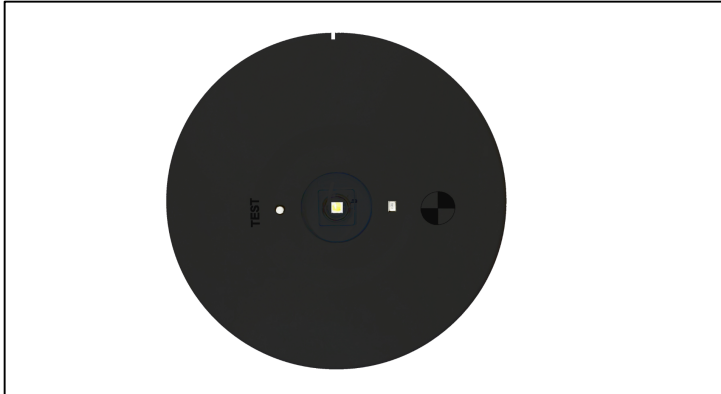

MODEL	CS-MRX-EMRD63-BK	VOLTAGE	AC 230V; 50Hz
INSTALLATION	Complete with 1.2m flex cable & plug	LIGHT SOURCE	High performance 4W LED with optical lens
MODE OF OPERATION	Non-maintained	POWER CONSUMPTION	2W (standby)
EMERGENCY DURATION	>120 min.	CHARGER	16hr intelligent 3-stage charge with battery management system
PROTECTION	Overcharge, low voltage disconnect, overcurrent, short circuit	TESTING FACILITY	Manual test switch
INDICATORS	Battery charger green LED	CONSTRUCTION	Flame-retardant polycarbonate
MOUNTING	Recessed	CUT-OUT	Ø70-Ø135 mm
DIMENSION	Disc: Ø95mm / Ø145mm H: 35mm	IP RATING	IP20
WEIGHT	1.0 Kg	WARRANTY	3 Years
OPERATING TEMPERATURE	1 to 40°C	RELATIVE HUMIDITY	0 to 95%
STANDARDS	RCM/EMC, AS/NZS 2293, AS/NZS 60598.1	AN/NZS 2293 CLASSIFICATION	C0 D63 C90 D63

SPACING TABLE	MOUNTING HEIGHT (M)								
NATA CLASSIFICATION	2.1	2.4	2.7	3.0	4.0	5.0	6.0	8.0	10.0
C0-D63	19.4	20.3	21.1	21.8	23.7	25.2	26.4	28.1	28.9
C90-D63	19.4	20.3	21.1	21.8	23.7	25.2	26.4	28.1	28.9