Emerex Premium Recessed Spitfire

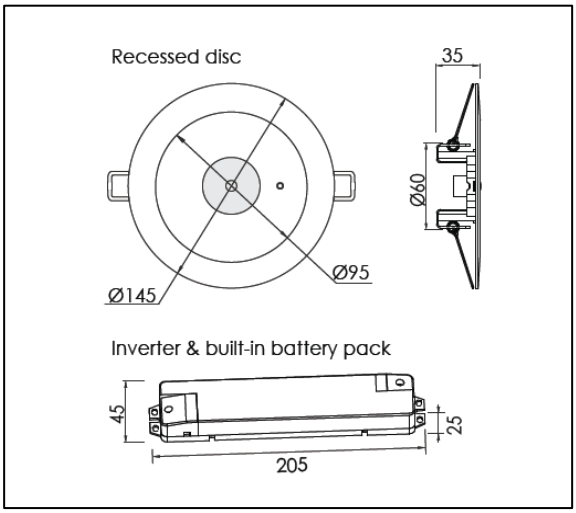

MODEL	CS-MRX-EMRD63	**IP**	20
LED BRAND	Osram	**IK**	07
DRIVER BRAND	SYNNOVATE	**OPERATING TEMPERATURE (°C)**	0 – 40°C
INPUT VOLTAGE (V)	230V	**MAINTAIN/NON-MAINTAIN OPERATION**	Non-maintained
POWER FACTOR (PF)	0.95	**EMERGENCY CLASSIFICATION**	D63
WATTAGE (W)	5W	**DIMMABLE**	NA
FLICKER FREE	YES	**INSTALLATION TYPE**	Recessed Mount – Ceiling
LUMEN OUTPUT (LM)	>485LM	**Cut-out (mm)**	80 or 120
EFFICACY (LM/W)	97LM/W	**DIMENSION (mm)**	145 x 145 x 35
COLOUR TEMPERATURE	6500K	**NET WEIGHT (kg)**	0.5
BEAM ANGLE (°)	170°	**LIFESPAN (Hours)**	50,000
CRI (Ra)	84	**WARRANTY (Years)**	3
HOUSING COLOUR & MATERIAL	White, ABS	**COMPLIANCE**	AS/NZS 2293, AS/NZS 60598, RCM

Yiyun Corporation Pty Ltd | ABN 39 074 449 988 | All information provided in this catalogue is subject to change at business discretion. Please contact the office for confirmation of pricing and stock availability at the time of order.