


JINHANG 6th Version SMD LED Floodlight 10W Frosted

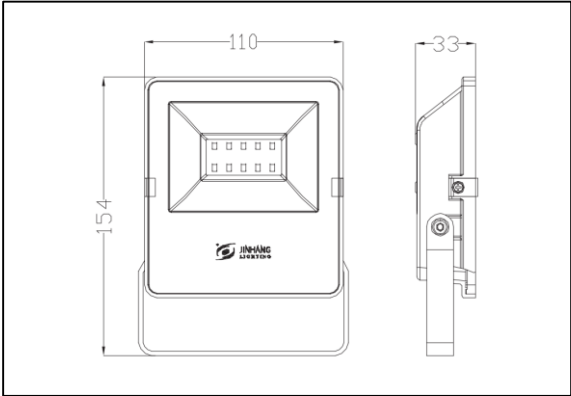

MODEL	JH-FL6-10W-3000K-FROSTED JH-FL6-10W-5700K-FROSTED	FINISH & MATERIAL	Aluminum, Black
INPUT VOLTAGE (V)	176-280V AC	IP	IP66
PROTECTION CALSS	Class I	IK	IK06
SPD (KV)	2.5KV	OPERATING TEMPERATURE (°C)	-25°C to +45°C
POWER FACTOR (PF)	0.9	DIMMABLE	No
WATTAGE (W)	10W	INSTALLATION TYPE	Surface Mount
LUMEN OUTPUT (Lm)	800 Lm	DIMENSION (mm)	L110 x H154 x D33 mm
EFFICACY (Lm/W)	80 Lm/W	NET WEIGHT (Kg)	0.48 Kg
COLOUR TEMPERATURE	3000K / 5700K	LIFESPAN (Hr.)	30,000 Hrs.
BEAM ANGLE (°)	120°	WARRANTY (Yr.)	3 Yrs.
CRI (Ra)	80	COMPLIANCE	SAA