


BQ Flood Light 100W 120D IK08

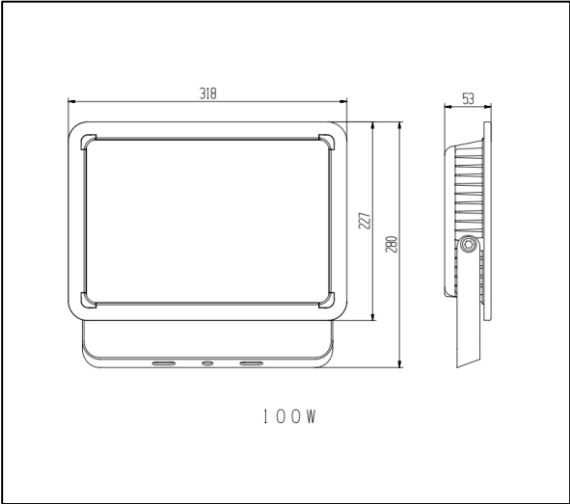

MODEL	CS-BQ-FLAP3-100W-6000K	FINISH & MATERIAL	Black, Aluminum body with tempered glass
INPUT VOLTAGE (V)	AC 180-260V	IP	IP65
PROTECTION CALSS	Class I	IK	IK08
SPD	2KV	AMBIENT TEMPERATURE (°C)	Ta 45°C
POWER FACTOR (PF)	0.9	OPERATING TEMPERATURE (°C)	-25 to +45°C
WATTAGE (W)	100W	DIMMABLE	No
FLICKER FREE	Yes	INSTALLATION TYPE	Surface mounted with bracket
LUMEN OUTPUT (Lm)	9,000 Lm	DIMENSION (mm)	L318 x W280 x H53 mm
EFFICACY (Lm/W)	90 Lm/W	NET WEIGHT (Kg)	1.8 Kg
COLOUR TEMPERATURE	6000K	LIFESPAN (Hrs.)	50,000 Hrs.
BEAM ANGLE (°)	120°	WARRANTY (Yrs.)	3 Yrs.
CRI (Ra)	>80	COMPLIANCE	SAA