


BQ X10 Highbay 100W 120D IK10

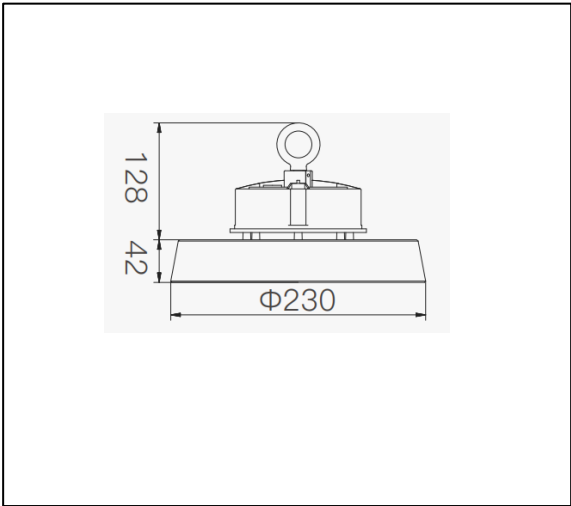

MODEL	CS-BQ-HBX10-100W-4000K-120D CS-BQ-HBX10-100W-5000K-120D CS-BQ-HBX10-100W-6000K-120D	FINISH & MATERIAL	Black, Aluminum body with PC lens
INPUT VOLTAGE (V)	AC 100-240V	IP	IP65
DRIVER TYPE	MeanWell Driver	IK	IK10
SPD	4KV	AMBIENT TEMPERATURE (°C)	Ta 45°C
POWER FACTOR (PF)	0.9	OPERATING TEMPERATURE (°C)	-25 to +45°C
WATTAGE (W)	100W	DIMMABLE	No
FLICKER FREE	Yes	INSTALLATION TYPE	Suspension, surface mounted
LUMEN OUTPUT (Lm)	13,000 Lm	DIMENSION (mm)	Ø230 x H170 mm
EFFICACY (Lm/W)	130 Lm/W	NET WEIGHT (Kg)	2.1 Kg
COLOUR TEMPERATURE	4000K / 5000K / 6000K	LIFESPAN (Hrs.)	50,000 Hrs.
BEAM ANGLE (°)	120°	WARRANTY (Yrs.)	5 Yrs.
CRI (Ra)	>80	COMPLIANCE	SAA

ACCESSORY FOR Highbay	DESCRIPTION	SIZE
CS-BQ-HBAL-100	BQ X10 Highbay 100W AL Shade	Ø450 x H120 x Ø158 mm
CS-BQ-HBZJ-100/150/200	BQ X10 AL Mounting Bracket (100W/150W/200W)	L265 x H120 mm