


## Oleve 40W Downlight 5000K 240mm Cut-out

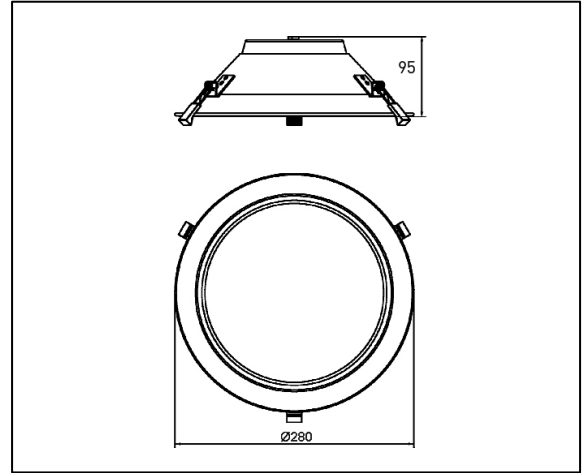

## PRODUCT SPECIFICATIONS:

|                               |                     |                                   |                           |
|-------------------------------|---------------------|-----------------------------------|---------------------------|
| <b>MODEL</b>                  | CS-LAE-OL-40W-5000K | <b>HOUSING COLOUR</b>             | MATT WHITE                |
| <b>INPUT VOLTAGE (V)</b>      | 220-240V AC         | <b>MATERIAL</b>                   | ALUMINUM                  |
| <b>PROTECTION CALSS</b>       | II                  | <b>IP</b>                         | Front: IP44<br>Back: IP20 |
| <b>POWER FACTOR (PF)</b>      | 0.9                 | <b>OPERATING TEMPERATURE (°C)</b> | -20°C to +45°C            |
| <b>WATTAGE (W)</b>            | 40W                 | <b>DIMMABLE (Y/N)</b>             | YES                       |
| <b>FLICKER FREE (Y/N)</b>     | YES                 | <b>DIMMING TYPE</b>               | TRIAC DIMMING             |
| <b>LUMEN OUTPUT (LM)</b>      | 4200LM              | <b>INSTALLATION TYPE</b>          | RECESSED                  |
| <b>EFFICACY (LM/W)</b>        | 105LM/W             | <b>CUT-OUT (mm)</b>               | Ø260                      |
| <b>COLOUR TEMPERATURE (K)</b> | 5000K               | <b>DIMENSION (mm)</b>             | Ø280*95                   |
| <b>BEAM ANGLE (° )</b>        | 100°                | <b>NET WEIGHT (kg)</b>            | 0.49                      |
| <b>CRI (Ra)</b>               | >80                 | <b>LIFE SPAN (Hour)</b>           | 50,000                    |
| <b>SDCM</b>                   | <5                  | <b>WARRANTY (Year)</b>            | 5                         |
| <b>UGR</b>                    | 25                  | <b>COMPLIANCE</b>                 | SAA, RCM                  |