




HIGH BAY LIGHT - 100W, 150W, 200W, 300W

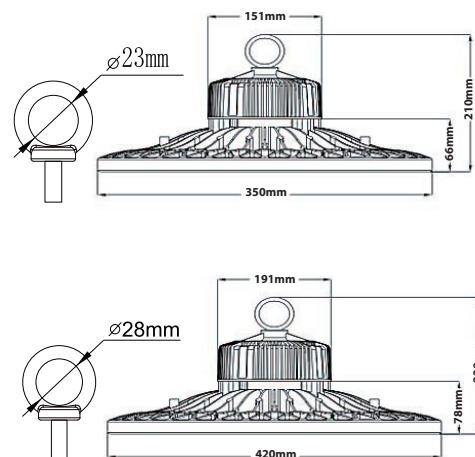


MODEL	JH-HB03	OPERATING TEMPERATURE	-40° TO 50°C
POWER	100,150,200,300W	DIMMABLE	YES
POWER FACTOR	>0.95	BEAM ANGLE	120°
VOLTAGE	AC 100-277V 50/60HZ	RATING	IP65
CCT	5000K - COOL WHITE	FINISH	BLACK
LUMINOUS OUTPUT	> 140Lm/W	DIMENSION	100W,150W,200W Ø 350mm x 210mm x 151mm
LIFESPAN	> 100,000HR		300W Ø 420mm x 220mm x 191mm
CRI	> 80	WARRANTY	7 years, Incl. labour warranty

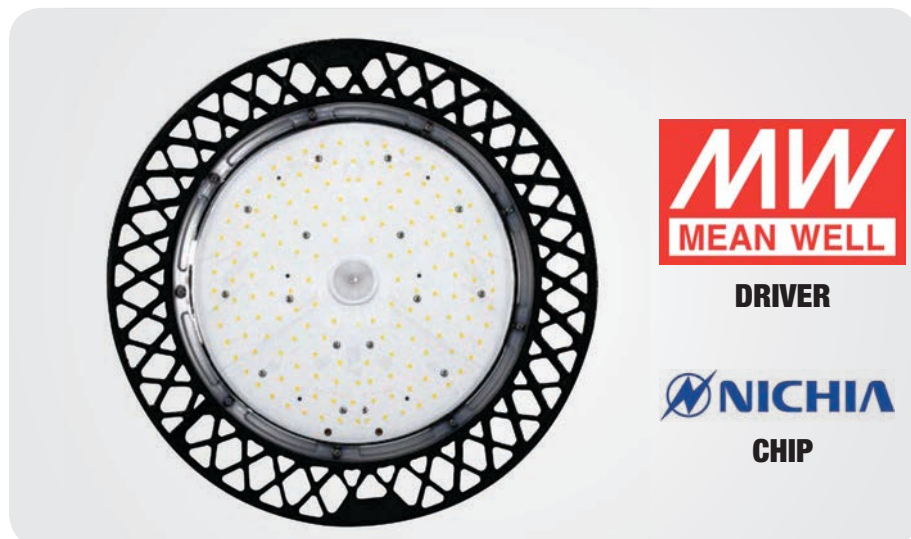

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

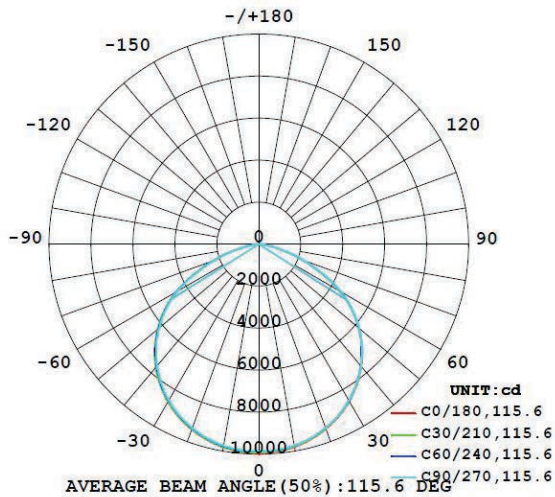

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

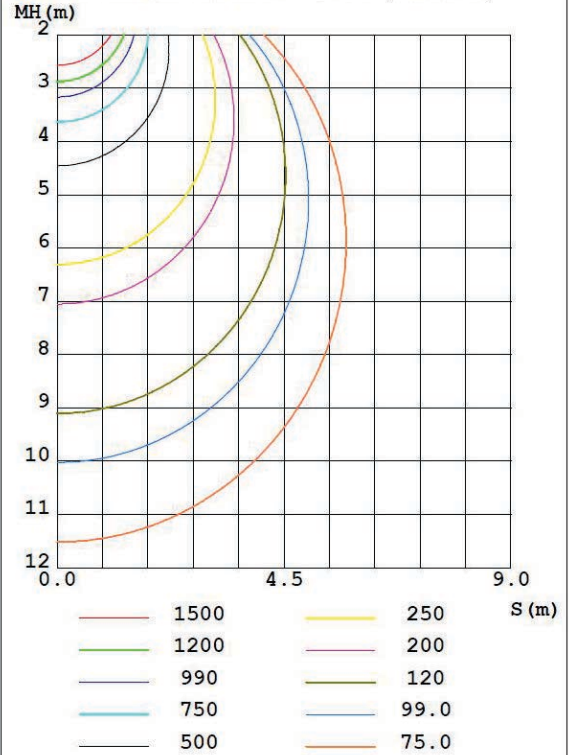

Flux out: 22175 lm

Height	Eavg, Emax	Angle: 115.14deg	Diameter
1m	2756, 9947 lx		314.78cm
2m	689.0, 2487 lx		629.56cm
3m	306.2, 1105 lx		944.33cm
4m	172.3, 621.7 lx		1259.11cm
5m	110.2, 397.9 lx		1573.89cm
6m	76.56, 276.3 lx		1888.67cm
7m	56.25, 203.0 lx		2203.45cm
8m	43.06, 155.4 lx		2518.23cm
9m	34.03, 122.8 lx		2833.00cm
10m	27.56, 99.47 lx		3147.78cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

