
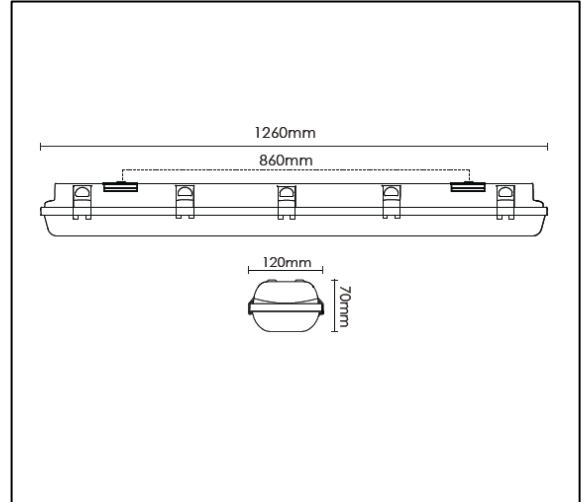


## Emerex Wall/Ceiling 4ft WP Emergency Fitting with Self Test

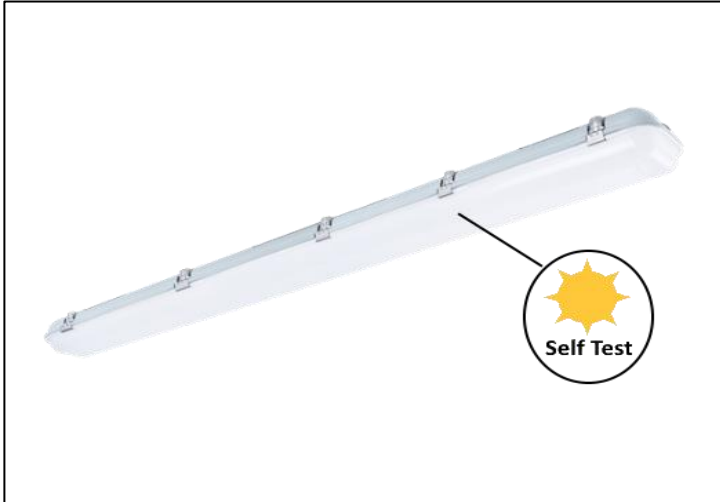

## Product Specification

|                          |                                |                                            |                                                  |
|--------------------------|--------------------------------|--------------------------------------------|--------------------------------------------------|
| <b>MODEL</b>             | CS-MRX-EMWP122-ST              | <b>HOUSING COLOUR &amp; MATERIAL</b>       | White, Polycarbonate                             |
| <b>LED BRAND</b>         | Osram                          | <b>IP</b>                                  | 65                                               |
| <b>DRIVER BRAND</b>      | SYNNOVATE                      | <b>IK</b>                                  | 10                                               |
| <b>INPUT VOLTAGE (V)</b> | 230V                           | <b>EMERGENCY DURATION (minutes)</b>        | >120                                             |
| <b>POWER FACTOR (PF)</b> | 0.95                           | <b>OPERATING TEMPERATURE (°C)</b>          | 0 to +40 °C                                      |
| <b>WATTAGE (W)</b>       | 40W                            | <b>MAINTAINED/NON-MAINTAINED OPERATION</b> | Switchable between maintained and non-maintained |
| <b>FLICKER FREE</b>      | YES                            | <b>DIMMABLE</b>                            | NA                                               |
| <b>LUMEN OUTPUT (LM)</b> | 3,800LM                        | <b>INSTALLATION TYPE</b>                   | Surface Mount – Wall / Ceiling                   |
| <b>EFFICENCY (LM/W)</b>  | 95LM/W                         | <b>DIMENSION (mm)</b>                      | 1260 x 120 x 70                                  |
| <b>CCT (K)</b>           | 4000K                          | <b>NET WEIGHT (kg)</b>                     | 3                                                |
| <b>CRI</b>               | >80                            | <b>LIFETIME (Hour)</b>                     | 50,000                                           |
| <b>BEAM ANGLE (°)</b>    | 120°                           | <b>WARRANTY (Year)</b>                     | 3                                                |
| <b>COMPLIANCE</b>        | AS/NZS 2293, AS/NZS 60598, RCM |                                            |                                                  |