
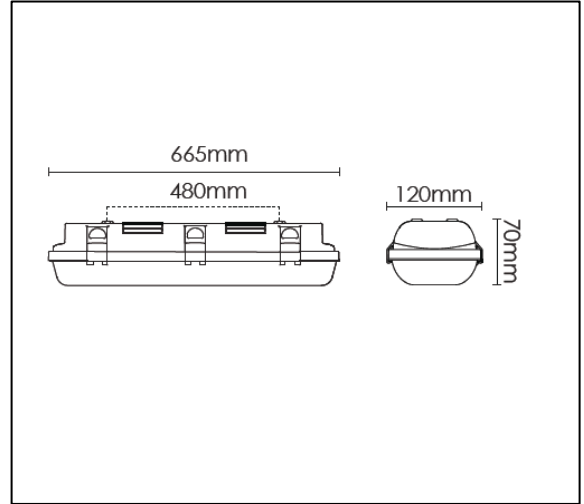


Emerex Wall/Ceiling 2ft WP Emergency Fitting with Self Test

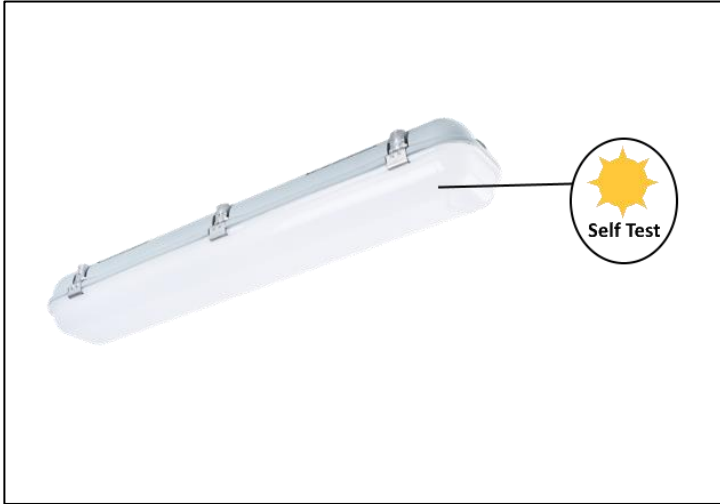

Product Specification

MODEL	CS-MRX-EMWP062-ST	HOUSING COLOUR & MATERIAL	White, Polycarbonate
LED BRAND	Osram	IP	65
DRIVER BRAND	SYNNOVATE	IK	10
INPUT VOLTAGE (V)	230V	EMERGENCY DURATION (minutes)	>120
POWER FACTOR (PF)	0.95	OPERATING TEMPERATURE (°C)	0 to +40 °C
WATTAGE (W)	20W	MAINTAINED/NON-MAINTAINED OPERATION	Switchable between maintained and non-maintained
FLICKER FREE	YES	DIMMABLE	NA
LUMEN OUTPUT (LM)	2,200LM	INSTALLATION TYPE	Surface Mount – Wall / Ceiling
EFFICENCY (LM/W)	110LM/W	DIMENSION (mm)	665 x 120 x 70
CCT (K)	4000K	NET WEIGHT (kg)	2
CRI	>80	LIFETIME (Hour)	50,000
BEAM ANGLE (°)	120°	WARRANTY (Year)	3
COMPLIANCE	AS/NZS 2293, AS/NZS 60598, RCM		