


Emerex Wall Flood Light Emergency Fitting with Self Test

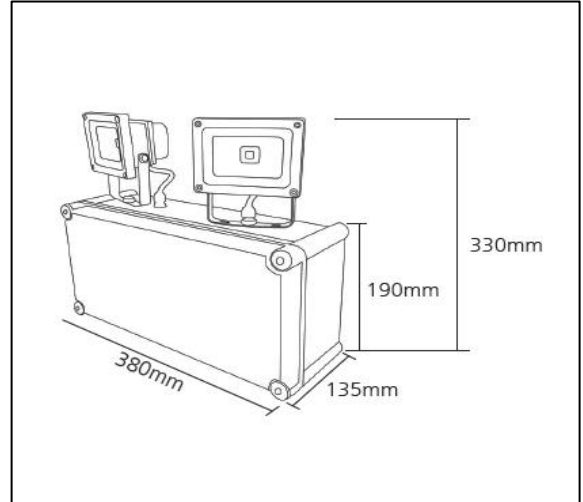

Product Specification

MODEL	CS-MRX-EMWP210F-ST	HOUSING COLOUR & MATERIAL	White, Polycarbonate
LED BRAND	Bridgelux	IP	65
DRIVER BRAND	SYNNOVATE	IK	09
INPUT VOLTAGE (V)	230V	EMERGENCY DURATION (minutes)	>120
POWER FACTOR (PF)	0.95	MAINTAINED/NON-MAINTAINED OPERATION	Switchable between maintained and non-maintained
WATTAGE (W)	2x10W	DIMMABLE	NA
FLICKER FREE	YES	INSTALLATION TYPE	Surface Mount – Wall
LUMEN OUTPUT (LM)	2,000 LM	DIMENSION (mm)	380 x 135 x 330
EFFICENCY (LM/W)	100 LM/W	NET WEIGHT (kg)	2.5
CCT (K)	6500K	LIFETIME (Hour)	50,000
CRI	>80	WARRANTY (Year)	3
BEAM ANGLE (°)	120°	COMPLIANCE	AS/NZS 2293, AS/NZS 60598, RCM