


Oleve 30W Downlight 5000K 190mm Cut-out

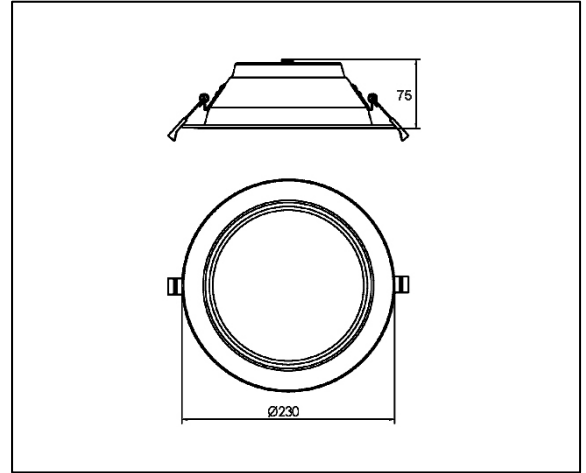

PRODUCT SPECIFICATIONS:

MODEL	CS-LAE-OL-30W-5000K	HOUSING COLOUR	MATT WHITE
INPUT VOLTAGE (V)	220-240V AC	MATERIAL	ALUMINUM
PROTECTION CALSS	II	IP	Front: IP44 Back: IP20
POWER FACTOR (PF)	0.9	OPERATING TEMPERATURE (°C)	-20°C to +45°C
WATTAGE (W)	30W	DIMMABLE (Y/N)	YES
FLICKER FREE (Y/N)	YES	DIMMING TYPE	TRIAC DIMMING
LUMEN OUTPUT (LM)	3000LM	INSTALLATION TYPE	RECESSED
EFFICACY (LM/W)	100LM/W	CUT-OUT (mm)	Ø190
COLOUR TEMPERATURE (K)	5000K	DIMENSION (mm)	Ø230*70
BEAM ANGLE (°)	100°	NET WEIGHT (kg)	0.36
CRI (Ra)	>80	LIFE SPAN (Hour)	50,000
SDCM	<5	WARRANTY (Year)	5
UGR	25	COMPLIANCE	SAA, RCM