


Emerex Wall/Ceiling 2ft WP Emergency Fitting with Sensor

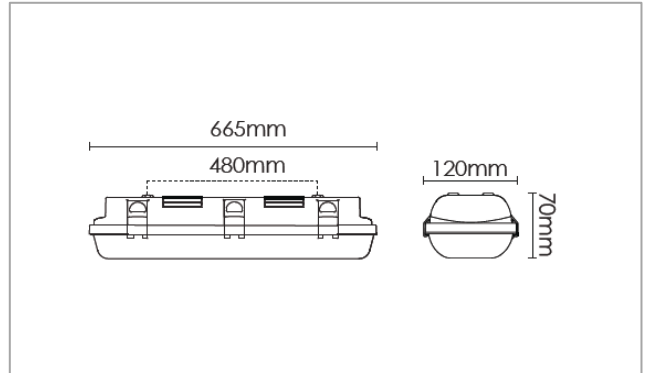

MODEL	CS-MRX-EMWP062-S	IK	10
LED BRAND	Osram	OPERATING TEMPERATURE (°C)	0 - 40°C
DRIVER BRAND	SYNNOVATE	MAINTAINED/NON-MAINTAINED	Switchable (between maintained and non-maintained)
INPUT VOLTAGE (V)	230V	Sensitivity	8m
POWER FACTOR (PF)	0.95	Duration	30s to 10min
WATTAGE (W)	20W	3 Stage Microwave Dimming Sensor	0%, 10%, 20%, 30% 1) ON at full brightness 2) after a while without motion (e.g. 3 min), it dims down to set level (e.g. 10%) 3) after a while at dimmed state, there is a further option to completely turn the light off (e.g. after 60mins, it goes to 0%)
FLICKER FREE (Y/N)	YES	DIMMABLE (Y/N)	YES
LUMEN OUTPUT (LM)	2,200LM	INSTALLATION TYPE	Surface Mount – Wall / Ceiling
EFFICACY (LM/W)	110LM/W	CUT-OUT (mm)	N/A
COLOUR TEMPERATURE	4000K	DIMENSION (mm)	665 x 120 x 70
BEAM ANGLE (°)	120°	NET WEIGHT (kg)	3
CRI (Ra)	84	LIFESPAN (Hours)	50,000
HOUSING COLOUR & MATERIAL	White, Polycarbonate + Acrylic Diffuser	WARRANTY (Years)	3
IP	65	COMPLIANCE	AS/NZS 2293, AS/NZS 60598, RCM