


## Emerex Wall/Ceiling Oyster Emergency Fitting

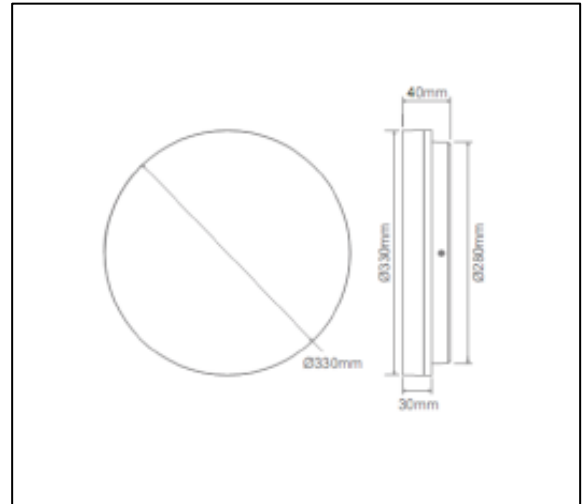

|                           |                              |                                        |                                |
|---------------------------|------------------------------|----------------------------------------|--------------------------------|
| <b>MODEL</b>              | CS-MRX-EM330C                | <b>HOUSING COLOUR &amp; MATERIAL</b>   | White, Polycarbonate           |
| <b>LED BRAND</b>          | Osram                        | <b>IP</b>                              | 65                             |
| <b>DRIVER BRAND</b>       | SYNNOVATE                    | <b>IK</b>                              | 09                             |
| <b>INPUT VOLTAGE (V)</b>  | 230V                         | <b>OPERATING TEMPERATURE (°C)</b>      | 0 – 40 °C                      |
| <b>POWER FACTOR (PF)</b>  | 0.95                         | <b>MAINTAIN/NON-MAINTAIN OPERATION</b> | Switchable in between          |
| <b>WATTAGE (W)</b>        | 23W                          | <b>DIMMABLE</b>                        | YES                            |
| <b>FLICKER FREE</b>       | YES                          | <b>INSTALLATION TYPE</b>               | Surface Mount – Wall / Ceiling |
| <b>LUMEN OUTPUT (LM)</b>  | 2,100LM                      | <b>DIMENSION (mm)</b>                  | 330 x 330 x 40                 |
| <b>EFFICACY (LM/W)</b>    | >90LM/W                      | <b>NET WEIGHT (kg)</b>                 | 2                              |
| <b>COLOUR TEMPERATURE</b> | Tricolour: 3000K-4000K-6000K | <b>LIFESPAN (Hours)</b>                | 50,000                         |
| <b>BEAM ANGLE (°)</b>     | 120°                         | <b>WARRANTY (Years)</b>                | 3                              |
| <b>CRI (Ra)</b>           | >80                          | <b>COMPLIANCE</b>                      | AS/NZS 2293, AS/NZS 60598, RCM |