


## Emerex Wall/Ceiling Oyster Emergency Fitting with Sensor

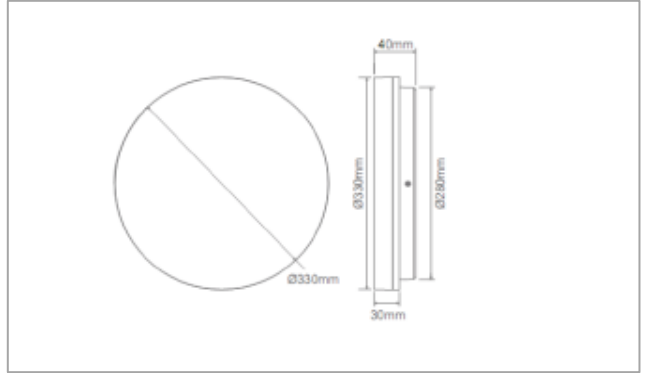

<b>MODEL</b>	CS-MRX-EM330C-S	<b>IK</b>	09
<b>LED BRAND</b>	Osram	<b>OPERATING TEMPERATURE (°C)</b>	0 - 40°C
<b>DRIVER BRAND</b>	SYNNOVATE	<b>MAINTAINED/NON-MAINTAINED</b>	Switchable (between maintained and non-maintained)
<b>INPUT VOLTAGE (V)</b>	230V	<b>Sensitivity</b>	8m
<b>POWER FACTOR (PF)</b>	0.95	<b>Duration</b>	30s to 10min
<b>WATTAGE (W)</b>	23W	<b>3 Stage Microwave Dimming Sensor</b>	0%, 10%, 20%, 30% 1) ON at full brightness 2) after a while without motion (e.g. 3 min), it dims down to set level (e.g. 10%) 3) after a while at dimmed state, there is a further option to completely turn the light off (e.g. after 60mins, it goes to 0%)
<b>FLICKER FREE (Y/N)</b>	YES	<b>DIMMABLE (Y/N)</b>	YES
<b>LUMEN OUTPUT (LM)</b>	2,100LM	<b>INSTALLATION TYPE</b>	Surface Mount – Wall / Ceiling
<b>EFFICACY (LM/W)</b>	>90LM/W	<b>CUT-OUT (mm)</b>	N/A
<b>COLOUR TEMPERATURE</b>	Tricolour: 3000K-4000K-6000K	<b>DIMENSION (mm)</b>	330 x 330 x 40
<b>BEAM ANGLE (°)</b>	120°	<b>NET WEIGHT (kg)</b>	2
<b>CRI (Ra)</b>	84	<b>LIFESPAN (Hours)</b>	50,000
<b>HOUSING COLOUR &amp; MATERIAL</b>	White, Polycarbonate + Acrylic Diffuser	<b>WARRANTY (Years)</b>	3
<b>IP</b>	65	<b>COMPLIANCE</b>	AS/NZS 2293, AS/NZS 60598, RCM