


JINHANG Floodlight V7 150W Sensor

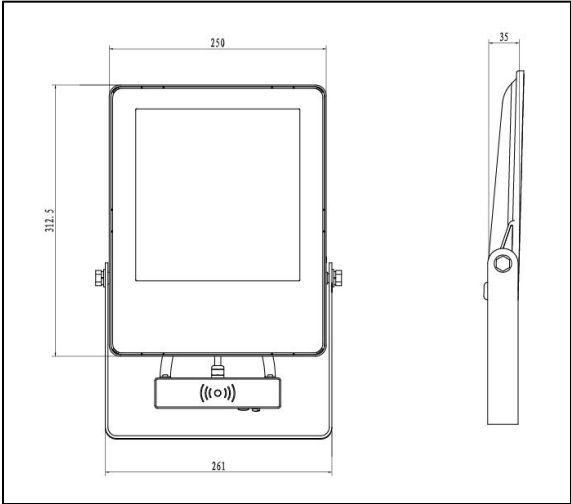

MODEL	CS-JH-FL13-150-Sensor	CRI (Ra)	75
LED BRAND & TYPE	Nichia	SDCM	<5
DRIVER BRAND & TYPE	Driver on board	HOUSING COLOUR & MATERIAL	Black, Magnesium-aluminum alloy/tempered glass
SENSOR DETECTION AREA	7~9m	SENSOR DETECTION ANGLE	180°
SENSOR HOLD TIME	5s/90s/5min/30min/+∞	DAYLIGHT SENSOR	30Lux
INPUT VOLTAGE (V)	AC 100-240V	IP	IP65
PROTECTION CLASS	Class I	IK	IK07
SPD (KV)	4KV	AMBIENT TEMPERATURE (°C)	40°C
POWER FACTOR (PF)	≥0.99	OPERATING TEMPERATURE (°C)	-40°C~+40°C
WATTAGE (W)	150W	DIMMABLE (Y/N)	N
FLICKER FREE	/	INSTALLATION TYPE	Bracket Mount
LUMEN OUTPUT (LM)	18,000 LM	DIMENSION (mm)	L312.5×W250×H35mm
EFFICACY (LM/W)	120 LM/W	NET WEIGHT (kg)	2.5Kg±0.2Kg
COLOUR TEMPERATURE	5000K	LIFESPAN (hr.)	≥100,000 hrs.
BEAM ANGLE (°)	120°	WARRANTY (yr.)	5 yrs.
COMPLIANCE	SAA		