


LiteLighting 32W LED Panel with Driver - Tri-colour 1200x300 IP44

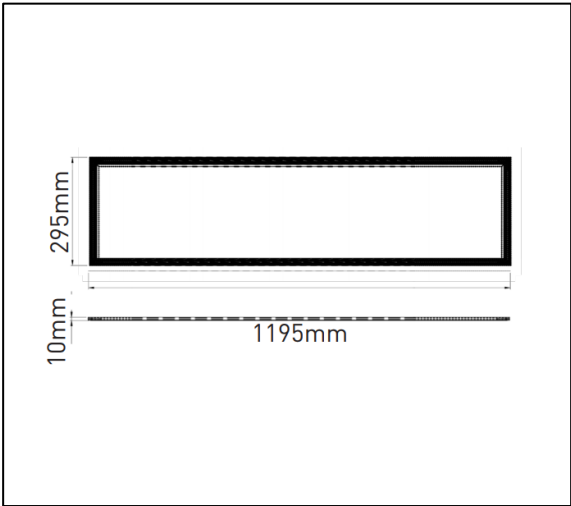

MODEL	LL-PL02-30120-IP44-32W-CCT-KIT	HOUSING COLOUR	White
INPUT VOLTAGE (V)	220-240V AC	MATERIAL	Polycarbonates
PROTECTION CALSS	Class II	IP	IP44
POWER FACTOR (PF)	>0.9	OPERATING TEMPERATURE (°C)	-20°C to +45°C
WATTAGE (W)	32W	DIMMABLE (Y/N)	No
FLICKER FREE (Y/N)	Yes	DIMMING TYPE	NA
LUMEN OUTPUT (LM)	3,200 LM	INSTALLATION TYPE	Ceiling Mount
EFFICACY (LM/W)	100 LM/W	DIMENSION (mm)	L1195 x W295 x H10 mm
COLOUR TEMPERATURE (K)	Tri-colour (3000K-4000K-6000K)	NET WEIGHT (kg)	1.5 Kg
BEAM ANGLE (°)	120°	LIFESPAN (hr.) @L70B50	50,000 hrs.
CRI (Ra)	>80	WARRANTY (yr.)	3 yrs.
UGR	<19	COMPLIANCE	SAA