


SAT3SPPFS BC15166S

Selected Hills splitters are suitable for free to air Antenna and approved for PAY TV Satellite installs, depending on the frequency range.

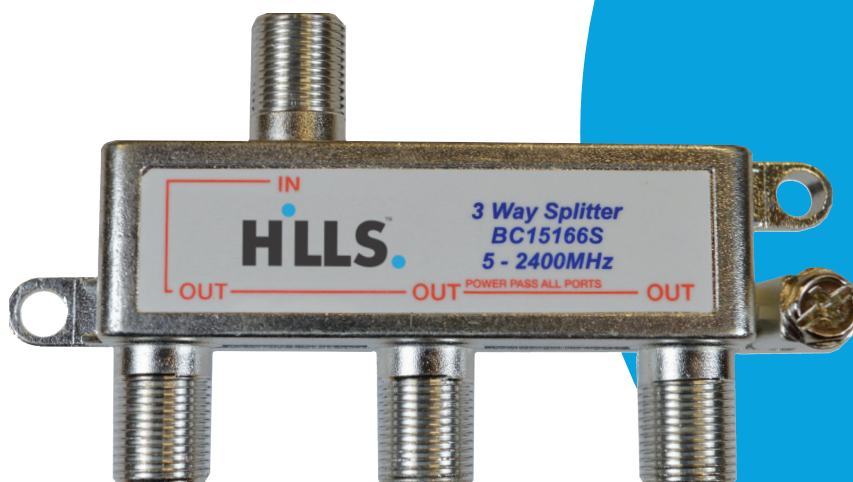

Key features

- Zinc die cast housing for mounting robustness and improved shielding
- F-Type connection for reliable use

Specifications

ITEM	FREQUENCY (MHz)	TYPICAL (dB)	Q.C. LIMIT (dB)
INSERTION LOSS (MAX.)	5-40	6.7	6.9
	40-950	7.5	7.7
	950-1450	9.3	9.5
	1450-2150	10.5	10.8
	2150-2400	11.5	12.0
ISOLATION. (MIN.)	5-40	22	20
	40-950	22	20
	950-1450	22	20
	1450-2150	22	20
	2150-2400	22	20
RETURN LOSS IN (MIN.)	5-40	17	15
	40-950	16	14
	950-1450	14	12
	1450-2150	17	15
	2150-2400	17	15
RETURN LOSS OUT (MIN.)	5-40	12	10
	40-950	15	13
	950-1450	14	12
	1450-2150	12	10
	2150-2400	12	10
DC PASS	IN-OUT	NO	
	OUT-OUT	NO	
	OUT-IN	YES	

FOXTEL APPROVAL NUMBER G83