


Janus 150W Canopy Light 5000K with Sensor

JANUS

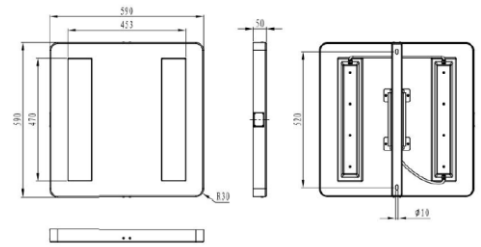

MODEL	CS-YHL-CP3-150-Sensor-5000K	SDCM	<5
LED BRAND & TYPE	Nichia	HOUSING COLOUR & MATERIAL	White, anti-corrosive material with frosted PC lens
DRIVER BRAND	Inventronics	IP	IP65
MOUNTING HEIGHT	Max. 15m (ceiling mounted)	DETECTION RANGE	Max. ϕ 14m(ceiling mounted) Max. 20m(wall mounted)
DETECTION AREA	25%/50%/75%/100%	DETECTION ANGLE	30~150°
HOLD TIME	5s/30s/1min/3min/5min/10min/20min/30min	STAND-BY PERIOD	0s/10s/30s/1min/5min/10min/30min/+∞
STAND-BY DIMMING LEVEL	10%/20%/30%/50%	DAYLIGHT THRESHOLD	2Lux/10Lux/50Lux/Disable
SPD	4KV	IK	IK10
INPUT VOLTAGE (V)	AC 100-277V	PROTECTION CLASS	Class I
AMBIENT TEMPERATURE (°C)	Ta 50°C	OPERATING TEMPERATURE (°C)	-40 to +50
POWER FACTOR	≥0.95	DIMMABLE (Y/N)	Yes
WATTAGE (W)	150W	INSTALLATION TYPE	Surface mount
LUMEN OUTPUT (LM)	22,500 LM	DIMENSION	L590 x W590 x H50mm
EFFICACY (LM/W)	150 LM/W	NET WEIGHT	5Kg
COLOUR TEMPERATURE	5000K	LIFESPAN	≥100,000 hrs.
BEAM ANGLE (°)	120°	WARRANTY	5 Yrs.
CRI(Ra)	75	COMPLIANCE	SAA, RCM