


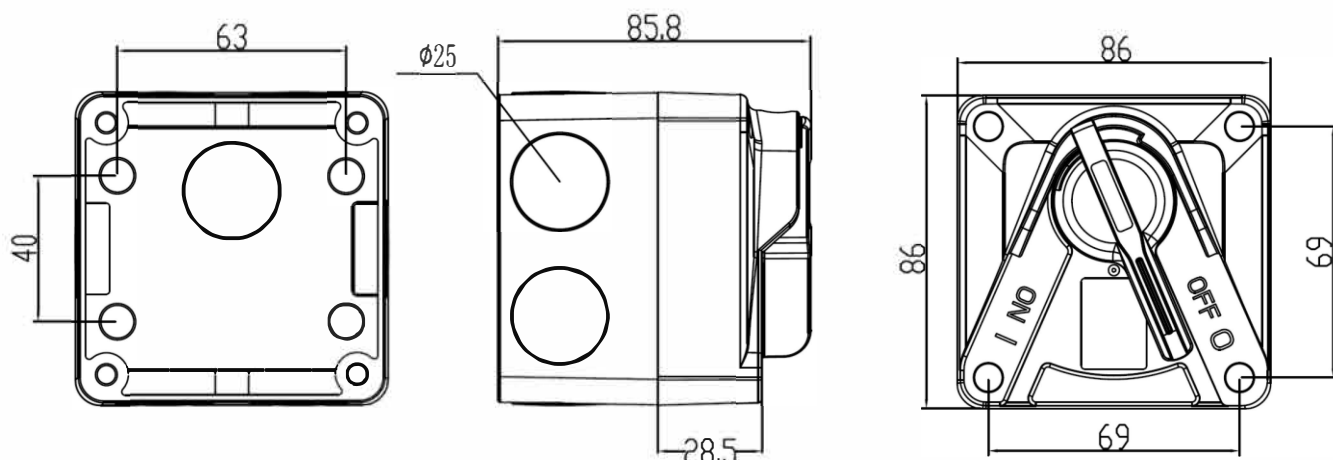

Technical Specifications:

Industrial

Usage: Areas subject to wash-down Outside

Voltage: 250V AC 50HZ

Amp: 10A/16A/20A/35A

IP Rating: IP66

Boby Material: Polycarbonate

Item Code	Description	MAX. CABLE (mm)	Nominal area of conductor (mm ²)
ISLM110	JinHang Weatherproof Switch 1 Pole 250V 10A IP66	Max. 24	1
ISLM116	JinHang Weatherproof Switch 1 Pole 250V 16A IP66		2.5
ISLM120	JinHang Weatherproof Switch 1 Pole 250V 20A IP66		2.5
ISLM135-B	Mini Square Weatherproof switch Single pole 250V 35A		6
ISLM210	JinHang Weatherproof Switch 2 Pole 250V 10A IP66		1
ISLM216	JinHang Weatherproof Switch 2 Pole 250V 16A IP66		2.5
ISLM220	JinHang Weatherproof Switch 2 Pole 250V 20A IP66		2.5
ISLM235-B	Mini Square Weatherproof switch Double pole 250V 35A		6