




SHOP SMART. SHOP VALUE  
SHOP *differently*



# 6000THL SMOKE ALARM CONTROL

Wireless Test/Hush/Locate Controller for Lifesaver 6000 Series Smoke Alarms

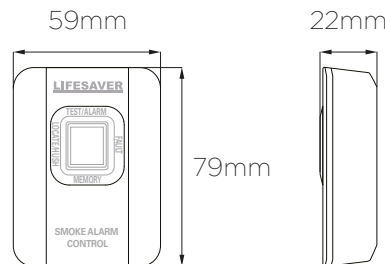

Tested & Complies to  
Australian Standards  
AS3786:2014



## Application

The PSA Lifesaver 6000THL smoke alarm controller allows compatible Lifesaver 6000 series smoke alarms to be conveniently tested, hushed and located, as well as offering a memory feature and status indication.

The 6000THL controller is wireless, and provides home owners with a more convenient method to identify which smoke alarm has activated, easily silence alarms and also promote regular testing of smoke alarms.

The 6000THL can control the Lifesaver 6000DCW wireless 10-year smoke alarms, and is also capable of controlling 6000 & 6000RL model smoke alarms when the units are mounted on 6000WB wireless bases.

6000THL remote control can be portable, used with mounted holding bracket, or unit can be fixed to wall.

## Features

- Wireless controller for 6000 series smoke alarms
- Powered by 10 year lithium battery (non-replaceable)
- Single button operation
- Remotely Test, Hush & Locate smoke alarms
- Locate initiating smoke alarm during an alarm event
- Memory feature to identify an activated smoke alarm
- Fault indicator if a fault is detected
- Portable or fixed mounting options

**LIFESAVER**

6000 SERIES

## 6000THL SMOKE ALARM CONTROL

Wireless Test/Hush/Locate Controller for Lifesaver 6000 Series Smoke Alarms

### Technical Specifications

Model	6000THL
Part Number	LIF6000THL
Power	10 year lithium battery (non-replaceable)
RF Frequency	918MHz
RF Range	100m line of sight 30m indoors
Operation	Up to 23 units
Temperature Range	0°C - 40°C
Humidity Range	Up to 93% RH (non-condensing)
Test/Alarm Indication	Red LED flashes 6 times repeatedly (in two groups of three flashes)
Locate Indication	Green LED flashes once every 2 seconds
Hush Indication	Green LED flashes 4 times quickly, then off
Memory Indication	Red LEDs flash 3 times every 40 seconds. (‘Memory’ LED on Wireless controller and on initiating smoke alarm)
Low Battery Indication	Amber LED flashes every 30 seconds
Dropout Indication	Amber LED flashes every 2 seconds
Approvals	AS/NZS 4268:2017 AS/NZS 3786:2014 (Selected Clause) AS/NZS CISPR 32:2015 AS/NZS 62368.1:2018 AS/NZS 2772.2:2016 AMD 1:2018
Warranty	2 years

### Product

LIF6000THL	Quantity	Barcode
Single	1	9318475001820
Pack	12	19318475001827
Carton	48	29318475001824

### Compatibility

6000DCW	10yr wireless smoke alarm
6000WB	Wireless baseplate
6000	240V, 9V battery backup
6000RL	240V, 10yr backup battery (non-replaceable)

**MOORABBIN**

131-133 Keys Road  
Moorabbin VIC 3189

**ALTONA**

1 Drake Boulevard  
Altona VIC 3018

**ALBION**

35 Sandgate Road  
Albion QLD 4010

**AUCKLAND**

10 Fairfax Avenue, Penrose  
Auckland 1061, New Zealand

sales@jh.market

www.jh.market

sales@jhmarket.co.nz  
jhmarket.co.nz

AU National: 1300 000 808

Queensland: 1300 000 707

NZ National: 0800 748 848

Yiyun Corporation Pty Ltd | All information in this catalogue is subject to change at business discretion.

Please contact the office for confirmation of pricing and stock availability at time of order