






SHOP SMART. SHOP VALUE
SHOP *differently*



6000DCW SMOKE ALARM

10 Year Lithium Battery (non-replaceable) with Wireless RF Interlink

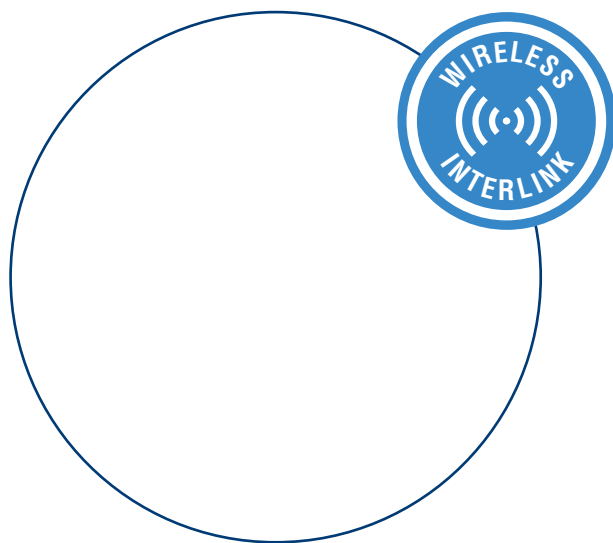

Tested & Complies to
Australian Standards
AS3786:2014



Application

The PSA Lifesaver 6000DCW model is a 10 year lithium battery powered smoke alarm with an in-built wireless RF interlink. It is designed to be interlinked with other 6000DCW units & Lifesaver 6000 series smoke alarms fitted with a 6000WB base.

When paired with the 6000THL (wireless smoke alarm controller), the 6000DCW smoke alarm can be operated via remote control, offering effortless test/hush functionality.

The alarm uses photoelectric technology is designed to be surface mounted on the ceiling or wall. 6000DCW can be used as a single stand alone unit, or be interconnected with up to 24 units.

Features

- Wireless, surface mount smoke alarm
- Powered by 10 year lithium battery (non-replaceable)
- Photoelectric sensing technology
- Compatible with 6000THL smoke alarm controller, and 6000 series alarms fitted with 6000WB wireless base
- Easy power on / power off baseplate
- Wirelessly interconnect up to 24 units
- Bug screen sensor chamber protection (0.8mm Ø)
- Electronics coating to prevent build up of heat and condensation caused by humidity and high temperatures
- Sensor interference filter technology to reduce false alarms
- Anti-static chamber to repel dust and reduce false alarms
- Single button test and hush feature, with low battery hush
- Fully supervised, secured and monitored wireless RF network
- 10 year warranty
- ActivFire certified, AS3786:2014, AS4268:2017

**LIFESAVER**

6000 SERIES

6000DCW SMOKE ALARM

10 Year Lithium Battery (non-replaceable) with Wireless RF Interlink

Technical Specifications

| | |
|----------------------|--|
| Model | 6000DCW |
| Part Number | LIF6000DCW |
| Sensor Type | Photoelectric |
| Smoke Alarm Power | Panasonic/FDK 10year 3VDC CR17335 fixed battery (non-replaceable) |
| RF Power | Panasonic/FDK 10year 3VDC CR17455 fixed battery (non-replaceable) |
| Interconnecting | Interconnectable up to 24 units |
| Alarm Volume | 85dBA at 3 metres |
| Alarm Signal Pattern | ISO8201 (T3 - Repeat 3 long beeps) |
| Temperature Range | 0°C - 45°C |
| Humidity Range | Up to 95% RH (non-condensing) |
| RF Frequency | 918MHz |
| RF Range | 100m line of sight 30m indoors |
| Hush Function | Silences alarm for 10 minutes Red LED flashes every 10 seconds Dense smoke will override hush function |
| Alarm Duration | Alarm will sound for as long as smoke is detected, then unit will automatically reset when smoke clears. |
| Alarm Indication | Red LED flashes every second. For interconnected, only the red LED of initiating unit will flash. |
| Chamber Monitoring | Red LED flashes 10 times and chirps every 30 seconds. Indicates maintenance is required. |
| Indicator LEDs | Red LED - Alarm status indicator, differentiated by frequency of flashes. |
| Approvals | ActivFire, SAI Global, RCM, AS3786:2014, AS4268:2017 |
| Warranty | 10 years |

Product

| LIF6000DCW | Quantity | Barcode |
|------------|----------|----------------|
| Single | 1 | 9318475001806 |
| Pack | 6 | 19318475001803 |
| Carton | 24 | 29318475001800 |

Compatibility

| | |
|---------|---|
| 6000THL | Smoke alarm control (wireless) |
| 6000WB | Wireless baseplate |
| 6000 | 240V, 9V battery backup |
| 6000RL | 240V, 10yr backup battery (non-replaceable) |

Accessories

| | |
|----------|-----------------------------------|
| LIFHA240 | Heat alarm with 9V battery backup |
| LIFCO240 | Carbon monoxide alarm |
| LIFLT711 | Smoke alarm tester (aerosol) |

**MOORABBIN**131-133 Keys Road
Moorabbin VIC 3189**ALTONA**1 Drake Boulevard
Altona VIC 3018**ALBION**35 Sandgate Road
Albion QLD 4010**AUCKLAND**10 Fairfax Avenue, Penrose
Auckland 1061, New Zealandsales@jh.market
www.jh.market
sales@jhmarket.co.nz
jhmarket.co.nzAU National: 1300 000 808
Queensland: 1300 000 707
NZ National: 0800 748 848Yiyun Corporation Pty Ltd | All information in this catalogue is subject to change at business discretion.
Please contact the office for confirmation of pricing and stock availability at time of order