


LiteLighting 10W IC Downlight Tricolour 90mm Cut-out

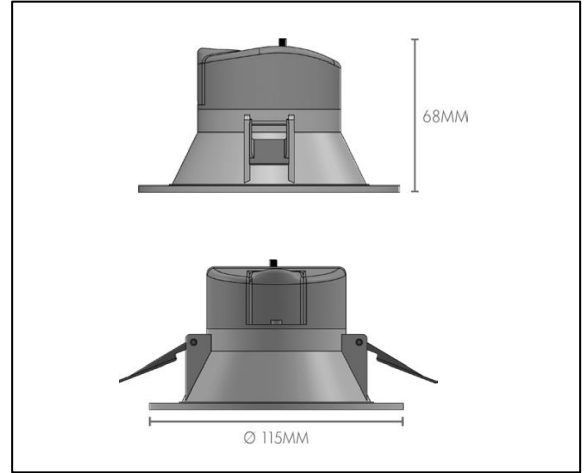

MODEL	LL-FDL3-IC-P9010D-CCT	MATERIAL	Polycarbonate
INPUT VOLTAGE (V)	220-240V AC	IP	IP44
IC-4 RATED (Y/N)	Yes	OPERATING TEMPERATURE (°C)	-20°C to +45°C
POWER FACTOR (PF)	0.9	DIMMABLE (Y/N)	Yes
WATTAGE (W)	10W	DIMMING TYPE	TRIAC dimming
FLICKER FREE (Y/N)	Yes	INSTALLATION TYPE	Recessed
LUMEN OUTPUT (LM)	820LM	CUT-OUT (mm)	Ø90
EFFICACY (LM/W)	82LM/W	DIMENSION (mm)	Ø115*H68
COLOUR TEMPERATURE (K)	Tricolour: 3000K-4000K-6000K	NET WEIGHT (kg)	0.23
BEAM ANGLE (°)	120°	LIFESPAN (hr.) @L70B50	30,000
CRI (Ra)	>80	WARRANTY (yr.)	3
HOUSING COLOUR	White	COMPLIANCE	SAA, RCM