




SHOP SMART. SHOP VALUE
SHOP *differently*



JinHang 150W LED Floodlight V6 5700K Clear

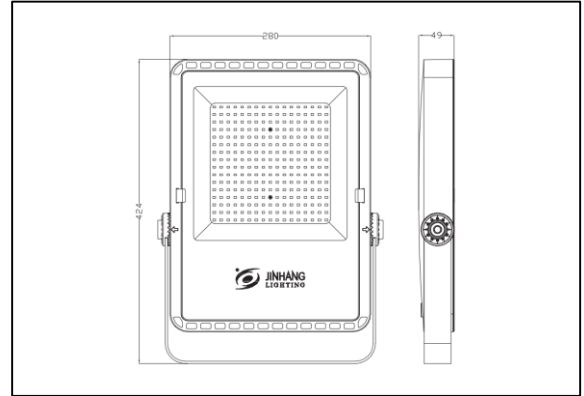

MODEL	JH-FL6-150W-5700K-CLEAR	FINISH & MATERIAL	Aluminum, Black
INPUT VOLTAGE (V)	176-280V AC	IP	IP66
PROTECTION CALSS	Class I	IK	IK06
SPD (KV)	2.5KV	OPERATING TEMPERATURE (°C)	-25°C to +45°C
POWER FACTOR (PF)	0.9	DIMMABLE	No
WATTAGE (W)	150W	INSTALLATION TYPE	Surface Mount
LUMEN OUTPUT (Lm)	12,000 Lm	DIMENSION (mm)	L280 x H424 x D49 mm
EFFICACY (Lm/W)	80 Lm/W	NET WEIGHT (Kg)	3.05 Kg
COLOUR TEMPERATURE	5700K	LIFESPAN (Hr.)	30,000 Hrs.
BEAM ANGLE (°)	120°	WARRANTY (Yr.)	3 Yrs.
CRI (Ra)	80	COMPLIANCE	SAA



MOORABBIN

131-133 Keys Road
Moorabbin VIC 3189

ALTONA

1 Drake Boulevard
Altona VIC 3018

ALBION

35 Sandgate Road
Albion QLD 4010

AUCKLAND

10 Fairfax Avenue, Penrose
Auckland 1061, New Zealand

sales@jh.market

www.jh.market

sales@jhmarket.co.nz
jhmarket.co.nz

AU National: 1300 000 808

Queensland: 1300 000 707

NZ National: 0800 748 848