


LAE_{AU} 15W Low UGR pure aluminum LED downlight 4000k cutout Φ120mm

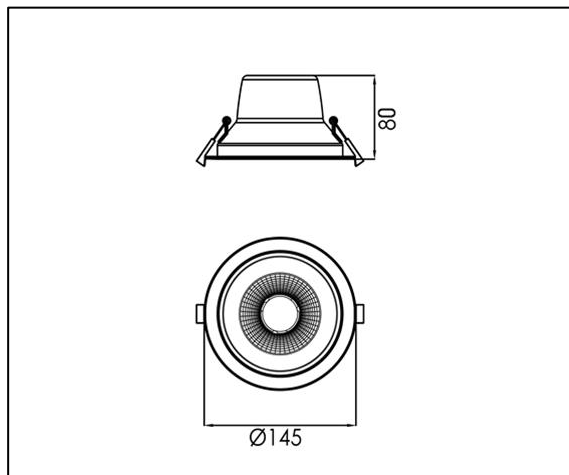

MODEL	CS-LAE-LG-15W-4000K	UGR	<19
INPUT VOLTAGE (V)	220-240	HOUSING COLOUR	MATT WHITE
PROTECTION CALSS	II	MATERIAL	PURE ALUMINUM
IC RATED	CA90	IP	20
POWER FACTOR (PF)	>0.85	OPERATING TEMPERATURE (° C)	-20°Cto +45°C
WATTAGE (W)	15	DIMMABLE (Y/N)	Y
FLICKER FREE (Y/N)	Y	DIMMING TYPE	TRIAC DIMMING
LUMEN OUTPUT (LM)	1450	CUT-OUT (mm)	Φ120-135mm
EFFICACY (LM/W)	95	DIMENSION (mm)	Φ145*80mm
COLOUR TEMPERATURE (K)	4000	NET WEIGHT (kg)	0.18
BEAM ANGLE (°)	50	LIFESPAN (hr.) @L70B50	50000
CRI (Ra)	>80	WARRANTY (yr.)	5
SDCM	<5	COMPLIANCE	SAA