




SHOP SMART. SHOP VALUE
SHOP *differently*



Gulite 15W 2-in-1 LED Downlight 4000K

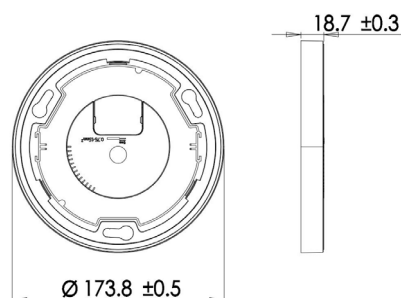

MODEL	CS-GPDL-A1-E17-15-840-01-B3PC	UGR	N/A
INPUT VOLTAGE (V)	200-240V	HOUSING COLOUR	White
PROTECTION CALSS	II	MATERIAL	Plastic
IC-4 RATED (Y/N)	N	IP	IP20
POWER FACTOR (PF)	>0.5	OPERATING TEMPERATURE (°C)	-20~40°
WATTAGE (W)	15W	DIMMABLE (Y/N)	NO
FLICKER FREE (Y/N)	N	DIMMING TYPE	NA
LUMEN OUTPUT (LM)	1000 LM	CUT-OUT (mm)	155
EFFICACY (LM/W)	>65 LM/W	DIMENSION (mm)	D173.8*18.7
COLOUR TEMPERATURE (K)	4000K	NET WEIGHT (kg)	0.36
BEAM ANGLE (°)	110°	LIFE SPAN	25000 HOURS
CRI (Ra)	>80	WARRANTY	3 YEARS
SDCM	<6	COMPLIANCE	SAA



MOORABBIN

131-133 Keys Road
Moorabbin VIC 3189

ALTONA

1 Drake Boulevard
Altona VIC 3018

ALBION

35 Sandgate Road
Albion QLD 4010

AUCKLAND

10 Fairfax Avenue, Penrose
Auckland 1061, New Zealand

sales@jh.market

www.jh.market

sales@jhmarket.co.nz

jhmarket.co.nz

AU National: 1300 000 808

Queensland: 1300 000 707

NZ National: 0800 748 848

Yiyun Corporation Pty Ltd | All information in this catalogue is subject to change at business discretion.

Please contact the office for confirmation of pricing and stock availability at time of order