



Unibody, compact Emergency Light for a discreet and unobtrusive appearance with a powerful emergency light source.

Features

- Unibody design
- Lifetime warranty on LED lamp
- D40 emergency classification
- Advanced Lithium batteries
- Recessed mounted
- Large (150mm) and small (90mm) disc
- Non-maintained operation
- Low energy consumption
- Complete with flex and plug cable
- Designed in accordance with AS/NZS 2293


Ordering Information

Part Number	Description	Box Quantity
MRX-EMRD	ONEFIRE D40 LED Recessed Mount Non-Maintained Emergency Downlight c/w Lithium Battery	10

Specifications

Input	Wiring	Lamp	Mode	Battery	Autonomy	Mounting	IP	Compliance	Classification
230VAC 50Hz	Complete with flex and plug	3W LED 5700K Lifetime Warranty	Non-Maintained	LiFePO4	> 120 mins	Ceiling, recessed mount	IP20	RCM, AS/NZS 2293, AS/NZS 60598.1	C0 D40 C90 D40

Dimensions

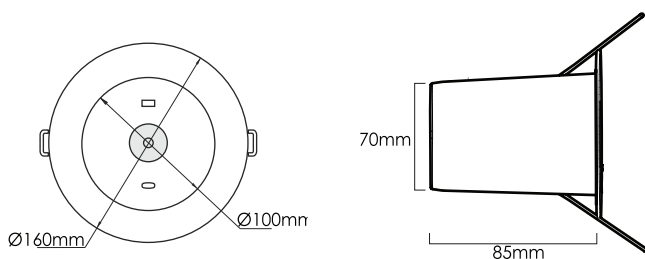

Spacing Table and Mounting Heights

NATA Classification	MOUNTING HEIGHT							
	2.1m	2.4m	2.7m	3.0m	4.0m	5.0m	6.0m	8.0m
C0 - D40	16.7	17.4	18.0	18.6	20.1	21.3	22.1	23.0
C90 - D40	16.7	17.4	18.0	18.6	20.1	21.3	22.1	23.0

Diameter	Cut-out	Length	Width	Weight
Large - 160mm Small - 100mm	Large - 150mm Small - 90mm	85mm	70mm	0.5kg

Specifications are subject to change without prior notice due to ongoing improvement.

Exclusive brand endorsed by:

