





SHOP SMART. SHOP VALUE
SHOP *differently*

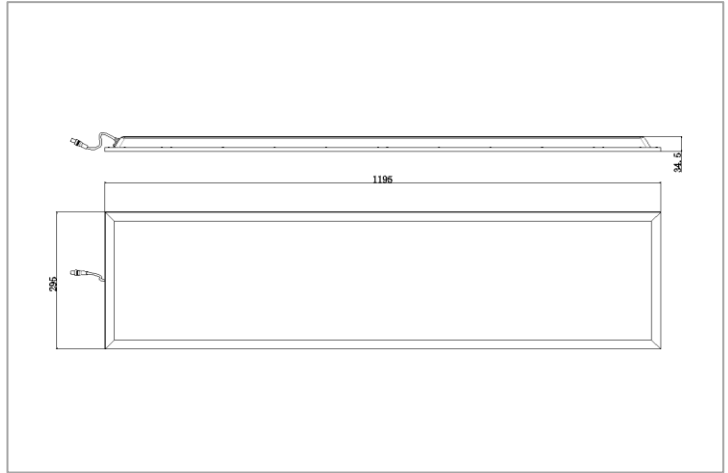

LiteLighting 32W Tri-colour Dimmable Backlit LED Panel 295x1195

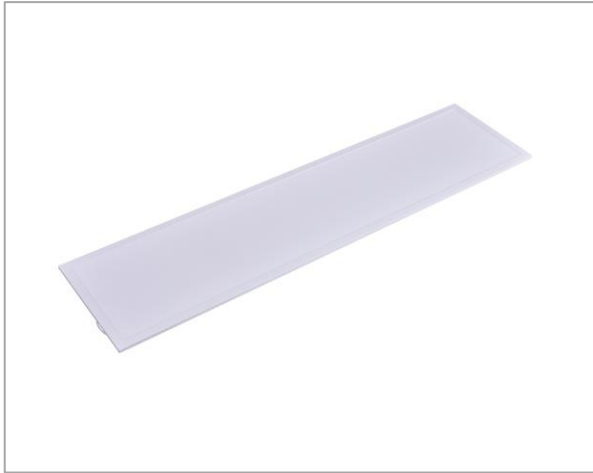

MODEL	CS-LL-PL03-30120D-32W-CCT	HOUSING COLOUR	White
INPUT VOLTAGE (V)	AC 220-240V	MATERIAL	PS+AL+SPCC
IC-4 RATED (Y/N)	NO	IP	20
POWER FACTOR (PF)	>0.9	OPERATING TEMPERATURE (°C)	0~40°C
WATTAGE (W)	32W	DIMMABLE (Y/N)	YES
FLICKER FREE (Y/N)	YES	DIMMING TYPE	Silicon Controlled Dimming
LUMEN OUTPUT (LM)	3,520LM	INSTALLATION TYPE	Recessed
EFFICACY (LM/W)	110LM/W	HOLE OUT (mm)	256*1156
COLOUR TEMPERATURE (K)	Tri-colour: 3000K/4000K/5700K	DIMENSION (mm)	295*1195*34.5
BEAM ANGLE (°)	110°	NET WEIGHT (kg)	1.9
CRI (Ra)	80	LIFESPAN (Hours)	50,000
SDCM	5	WARRANTY	3 years
UGR	22	COMPLIANCE	SAA, RCM



MOORABBIN
131-133 Keys Road
Moorabbin VIC 3189

ALTONA
1 Drake Boulevard
Altona VIC 3018

ALBION
35 Sandgate Road
Albion QLD 4010

AUCKLAND
10 Fairfax Avenue, Penrose
Auckland 1061, New Zealand

sales@jh.market
www.jh.market
sales@jhmarket.co.nz
jhmarket.co.nz

AU National: 1300 000 808
Queensland: 1300 000 707
NZ National: 0800 748 848

Yiyun Corporation Pty Ltd | All information in this catalogue is subject to change at business discretion.
Please contact the office for confirmation of pricing and stock availability at time of order