


LiteLighting 16W Tri-colour Non-dimmable Backlit LED Panel 295x595

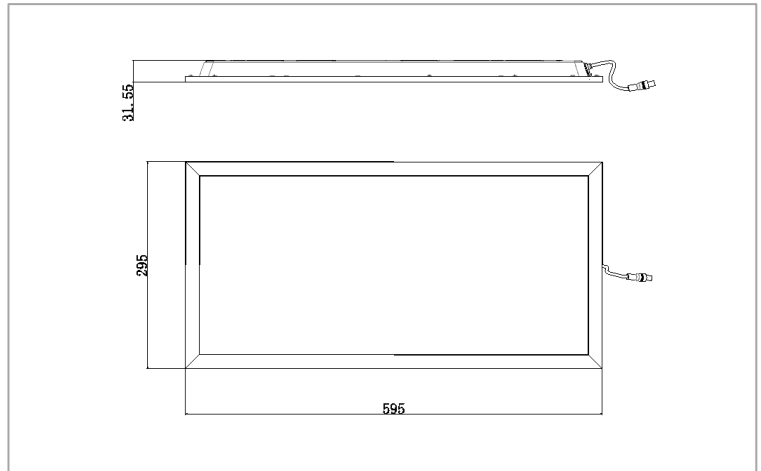

MODEL	CS-LL-PL03-3060ND-16W-CCT	HOUSING COLOUR	White
INPUT VOLTAGE (V)	AC 220-240V	MATERIAL	PS+AL+SPCC
IC-4 RATED (Y/N)	NO	IP	20
POWER FACTOR (PF)	>0.9	OPERATING TEMPERATURE (°C)	0~40°C
WATTAGE (W)	16W	DIMMABLE (Y/N)	NO
FLICKER FREE (Y/N)	YES	DIMMING TYPE	NA
LUMEN OUTPUT (LM)	1,760	INSTALLATION TYPE	Recessed
EFFICACY (LM/W)	110LM/W	HOLE OUT (mm)	256*556
COLOUR TEMPERATURE (K)	Tri-colour: 3000K/4000K/5700K	DIMENSION (mm)	295*595*32
BEAM ANGLE (°)	110°	NET WEIGHT (kg)	1
CRI (Ra)	80	LIFESPAN (Hours)	50,000
SDCM	5	WARRANTY	3 years
UGR	22	COMPLIANCE	SAA, RCM