


Rafe 12W Downlight COB 90mm Cut-out

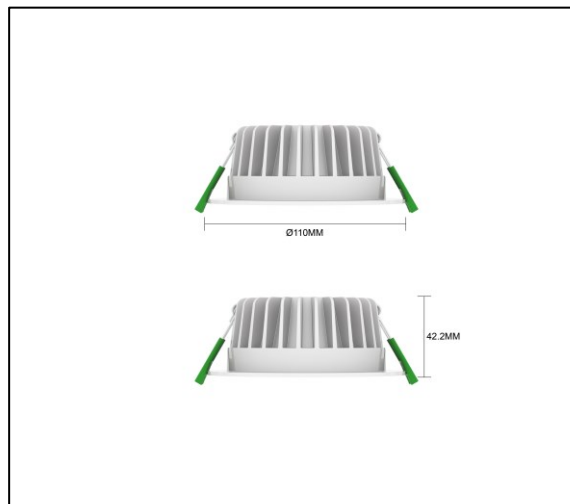

MODEL	CS-CGD-LD533(COB)-12W-3000K-90MM-60D-IP54-WH CS-CGD-LD533(COB)-12W-4000K-90MM-60D-IP54-WH CS-CGD-LD533(COB)-12W-5000K-90MM-60D-IP54-WH	UGR	<19
LED BRAND	CREE	HOUSING COLOUR	WHITE
INPUT VOLTAGE (V)	220-240V; 50/60Hz	MATERIAL	ALUMINUM
PROTECTION CLASS	CLASS II	IP	IP54
IC-4 RATED (Y/N)	YES	OPERATING TEMPERATURE (°C)	-20°C to +40°C
POWER FACTOR (PF)	0.9	DIMMABLE (Y/N)	YES
WATTAGE (W)	12W	DIMMING TYPE	TRIAC DIMMING
FLICKER FREE (Y/N)	YES	INSTALLATION TYPE	RECESSED
LUMEN OUTPUT (LM)	880LM	CUT-OUT (mm)	Ø90mm
EFFICACY (LM/W)	73LM/W	DIMENSION (mm)	Ø110 x H42.2mm
COLOUR TEMPERATURE (K)	3000K / 4000K / 5000K	NET WEIGHT (kg)	0.227 Kg
BEAM ANGLE (°)	60°	LIFESPAN (hr.) @L70B50	50,000 HR
CRI (Ra)	90	WARRANTY (yr.)	3 YEARS
SDCM	<3	COMPLIANCE	SAA