




SHOP SMART. SHOP VALUE
SHOP *differently*



Janus Z15 Arc Batten 5000K 1250x150x65

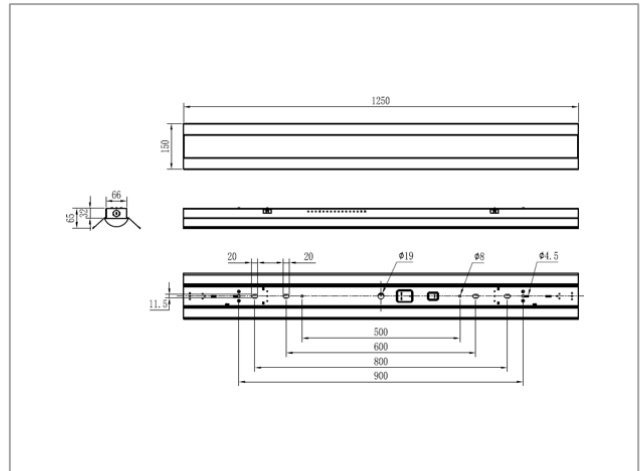

MODEL	CS-YHL-PL5-Z15-5000K	UGR	<19
INPUT VOLTAGE (V)	AC 100-240V	HOUSING COLOUR	WHITE
PROTECTION CALSS	Class II	MATERIAL	PC
IC-4 RATED	NO	IP	IP20
POWER FACTOR (PF)	≥0.9	IK	IK08
WATTAGE (W)	20W/30W/40W	OPERATING TEMPERATURE (°C)	-20 to +45
FLICKER FREE (Y/N)	YES	DIMMABLE (Y/N)	YES
LUMEN OUTPUT (LM)	2,800/4,200/5,600LM	INSTALLATION TYPE	Surface Mount
EFFICACY (LM/W)	140LM/W	DIMENSION (mm)	L1250 × W150 × H65
COLOUR TEMPERATURE (K)	5000K	NET WEIGHT (KG)	2.2
BEAM ANGLE (°)	120°	LIFESPAN (HOURS)	≥100,000
CRI (Ra)	80	WARRANTY (YEARS)	3
SDCM	<5	COMPLIANCE	SAA, RCM



MOORABBIN
131-133 Keys Road
Moorabbin VIC 3189

ALTONA
1 Drake Boulevard
Altona VIC 3018

EPPING
103 Gateway Blvd
Epping VIC 3076

ALBION
35 Sandgate Road
Albion QLD 4010

AUCKLAND
10 Fairfax Avenue, Penrose
Auckland 1061, New Zealand

sales@jh.market
www.jh.market
sales@jhmarket.co.nz
jhmarket.co.nz

AU National: 1300 000 808
Queensland: 1300 000 707
NZ National: 0800 748 848

Yiyun Corporation Pty Ltd | All information in this catalogue is subject to change at business discretion.
Please contact the office for confirmation of pricing and stock availability at time of order