


Janus Q33 Arc Batten 5000K 1275x325x65

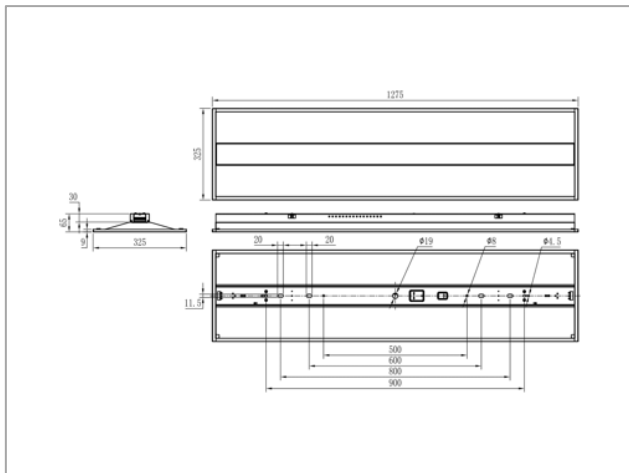

MODEL	CS-YHL-PL5-Q33-5000K	UGR	<19
INPUT VOLTAGE (V)	AC 100-240V	HOUSING COLOUR	WHITE
PROTECTION CALSS	Class II	MATERIAL	PC
IC-4 RATED	NO	IP	IP20
POWER FACTOR (PF)	≥0.9	IK	IK08
WATTAGE (W)	20W/30W/40W	OPERATING TEMPERATURE (°C)	-20 to +45
FLICKER FREE (Y/N)	YES	DIMMABLE (Y/N)	YES
LUMEN OUTPUT (LM)	2,800/4,200/5,600LM	INSTALLATION TYPE	Surface Mount
EFFICACY (LM/W)	140LM/W	DIMENSION (mm)	L1275 × W325 × H65
COLOUR TEMPERATURE (K)	5000K	NET WEIGHT (KG)	2.1
BEAM ANGLE (°)	120°	LIFESPAN (HOURS)	≥100,000
CRI (Ra)	80	WARRANTY (YEARS)	3
SDCM	<5	COMPLIANCE	SAA, RCM