


## LiteLighting G2 40W LED Panel with Driver - 600x600 IP44

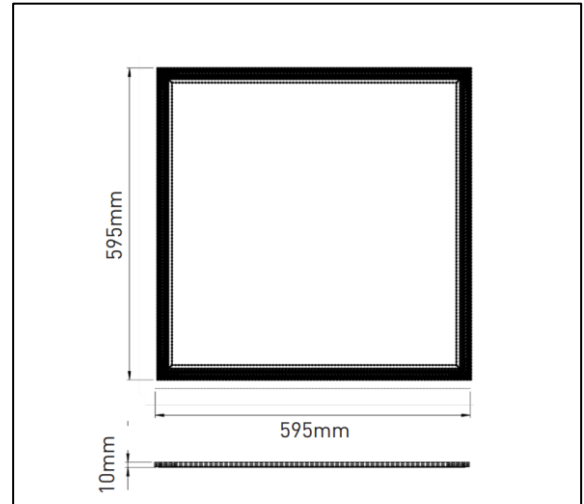

|                        |                       |                            |                    |
|------------------------|-----------------------|----------------------------|--------------------|
| MODEL                  | LL-PL02-6060-IP44-40W | HOUSING COLOUR             | White              |
| INPUT VOLTAGE (V)      | 220-240V AC           | MATERIAL                   | Polycarbonates     |
| PROTECTION CALSS       | Class II              | IP                         | IP44               |
| POWER FACTOR (PF)      | >0.9                  | OPERATING TEMPERATURE (°C) | -20°C to +45°C     |
| WATTAGE (W)            | 40W                   | DIMMABLE (Y/N)             | No                 |
| FLICKER FREE (Y/N)     | Yes                   | DIMMING TYPE               | NA                 |
| LUMEN OUTPUT (LM)      | 4,000 LM              | INSTALLATION TYPE          | Ceiling Mount      |
| EFFICACY (LM/W)        | 100 LM/W              | DIMENSION (mm)             | 595 x 595 x H10 mm |
| COLOUR TEMPERATURE (K) | 4000K / 5000K / 6000K | NET WEIGHT (kg)            | 1.5 Kg             |
| BEAM ANGLE (°)         | 120°                  | LIFESPAN (hr.) @L70B50     | 50,000 hrs.        |
| CRI (Ra)               | >80                   | WARRANTY (yr.)             | 3 yrs.             |
| UGR                    | <19                   | COMPLIANCE                 | SAA                |