


---

# CEILING FAN INSTALLATION MANUAL

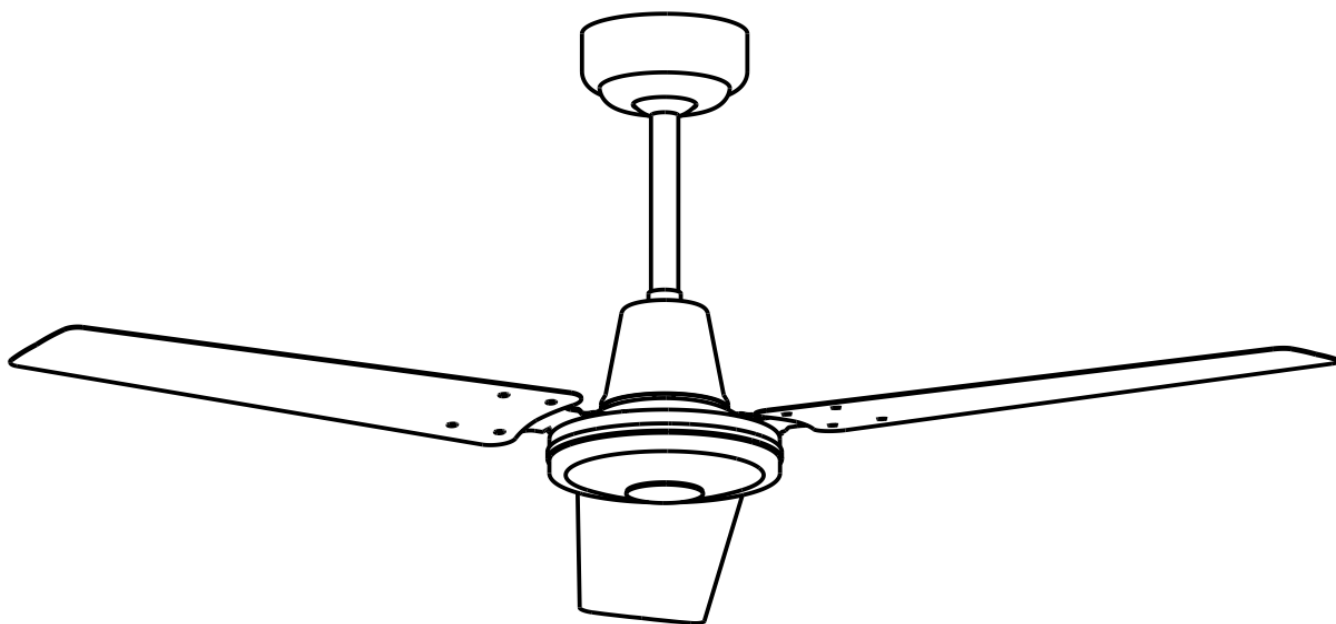

## CAUTION

READ INSTRUCTIONS CAREFULLY FOR SAFE INSTALLATION  
AND FAN OPERATION

# QXH

## ATTENTION:



---

## Important considerations

1. The hangsare style is suitable for both flat and inclined ceilings (up to maximum angle of 20°).
2. This fan has been supplied with a 3 speed fan controller / Remote Controller. It is designed to operate a single fan only.
3. The fan is to be installed so that the fan blades are more than 2.1m above floor level. Fan blades should have clearances >300mm from any obstacles.
4. During installation a switch disconnection should be incorporated in the supply circuit.
5. Blades provided are paired for individual fan and must not be mixed with blades from other fans. This may affect performance and cause vibration/wobble. If unusual oscillating movement is observed, stop using the ceiling fan immediately and contact JH MARKET (QXH), its service agent or a suitably qualified person.

## Product Notes

1. This product must be installed by a licensed electrician and used as per these instructions.
2. This product contains no serviceable parts and no attempt should be made to repair this product. If the product is faulty it should be discarded.
3. This product must be cleaned periodically with a damp cloth. Cleaning agents and solvents should never be used.
4. This product has been designed to operate in ambient temperatures between 5C to 40°C.
5. This product must be securely attached to a structural member for support. Fixing means (hooks & brackets) must be fixed to the structural member with sufficient strength to withstand 4 times the weight of the ceiling fan.
6. During installation the mains supply wiring terminals should be tightened between 0.4Nm and 0.6Nm. Over-tightening may damage the terminal. Under-tightening may result in hot joints.
7. This product is not intended to be exposed to direct weathering. It is not suitable for installation in hazardous and/or corrosive areas. It is not suitable for marine environments such as areas subjected to salt spray and/or mist.
8. This product is not intended for use by young children or infirm persons without supervision. Young children should be supervised to ensure that they do not play with the appliance.
9. Only those accessories as supplied by QXH are designed for operation with the fan.
10. Extended exposure to UV rays (such as exposure to direct sunlight) may cause discoloration of this product.
11. The material in this product may vary in color from batch to batch. Color matching from one batch to another cannot be guaranteed.
12. This product has been designed to operate on a nominal supply voltage of 230V -240Va.c.± 6%6.
13. After installation this product must be tested as required by the appropriate government and/or statutory regulations.
14. This product utilizes intellectual property in the form of registered designs, trademarks, and/or patents. Such intellectual property remains the property of QXH in all cases.
15. QXH reserves the right to modify the specification of this product at any time.

---

# INSTALLATION INSTRUCTIONS

## IMPORTANT SAFETY PRECAUTIONS:


1. Before wiring the paddle fan, turn off the electric power supply at the main fuse box or main circuit breaker and leave it off until installation is complete.
2. The outlet box and support structure must be securely mounted and capable of reliably supporting a minimum of 35 pounds. Use only metallic outlet boxes.
3. Do not install paddle fan less than 7 feet between floor and lowest edge of fan blades.
4. All wiring must be in accordance with the National Electrical Code and local electrical codes. Electrical installation should be performed by a qualified licensed electrician.
5. Do not operate reversing switch while fan blades are in motion. Fan must be turned off and blades stopped before reversing blade direction.
6. Avoid placing objects in the path of the blades.
7. Do not use water or detergents when cleaning the fan or fan blades. A dry dust cloth or lightly dampened cloth will be suitable for most cleaning.
8. After making electrical connections spliced conductors should be turned upward and pushed carefully up into outlet box. The wires should be spread apart with the grounded conductor and the equipment-grounding conductor on one side of the outlet box.

## INSTALLATION INSTRUCTIONS

### ——Part List——



1 x Mounting Bracket



1 x Motor Assembly




3 x Blades




1 x Hardware Bag



1 x Instruction Manual

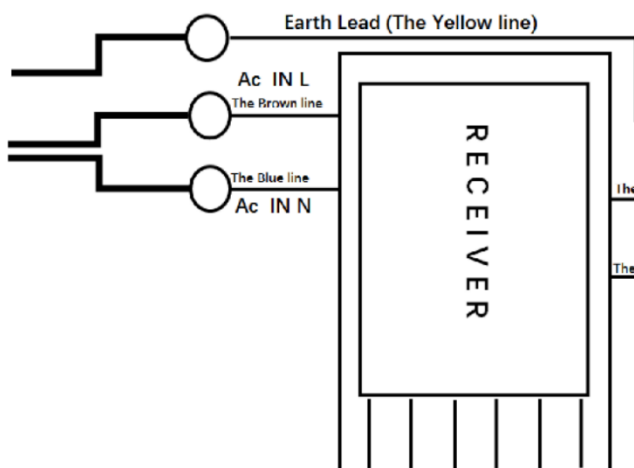


1\*Receiver

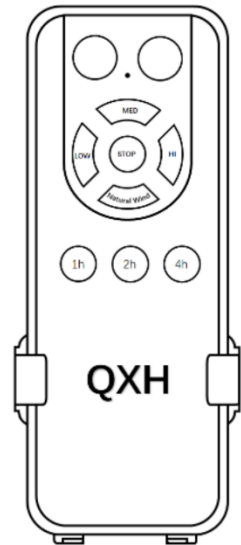


1\*Control


① **Fan and mounting bracket must be earthed during installation. Secure the mounting bracket to the ceiling joist or suitable place of timer inserted between the ceiling joists. The bracket should be attached with two timber screws and washers supplied.**

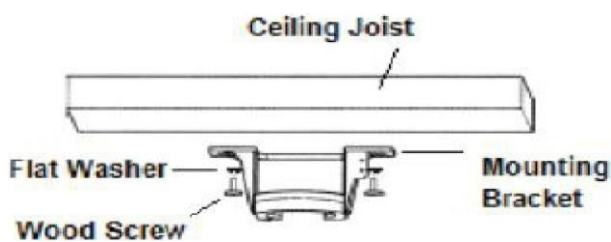


② **Carefully lift motor assembly onto mounting bracket. Install the ball joint onto the mounting bracket opening. Rotate fan until notch on downrod ball engages the ridge on the mounting bracket.**

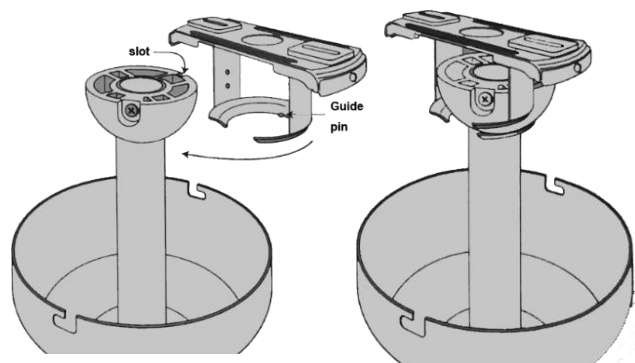


③ **Align key holes on canopy with protruding screw heads from the mounting bracket. Lift the canopy up to the mounting bracket, making sure not to break any wire connection.**

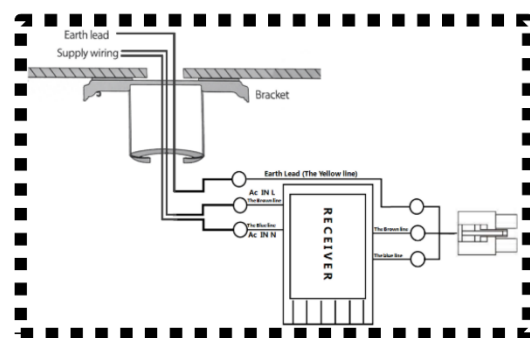


④ **Put the RECEIVER between the ball joint and the mounting bracket. After this will allow hands free wiring. Connect the wires in accordance to the wiring diagram provided.**




⑤ **Wiring. Connect the terminal strip of Receiver to the terminal strip of Motor. On the other side, connect AC with Supply Wiring & Earth Lead accordingly.**

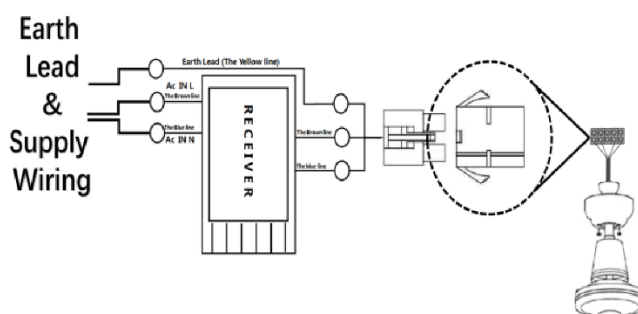

⑥ **Fix the blades firmly onto the motor head by screws and washers.**

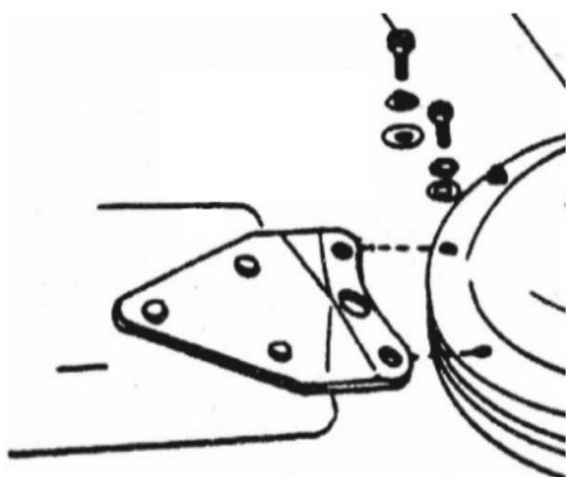


⑦ **Double confirm that all above 5 steps are connecting correctly and the whole Ceiling fan is installation firmly.**

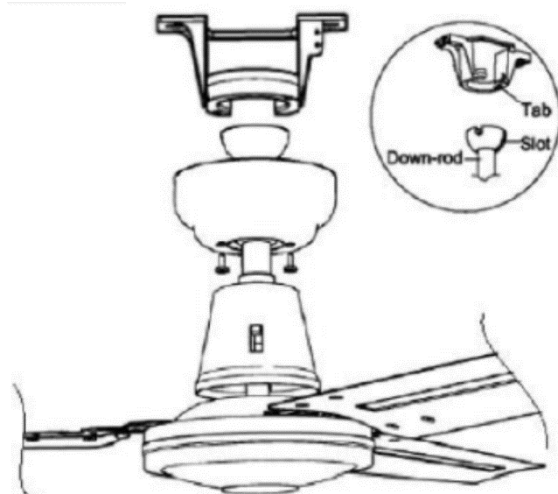

---

## Wire terminal box

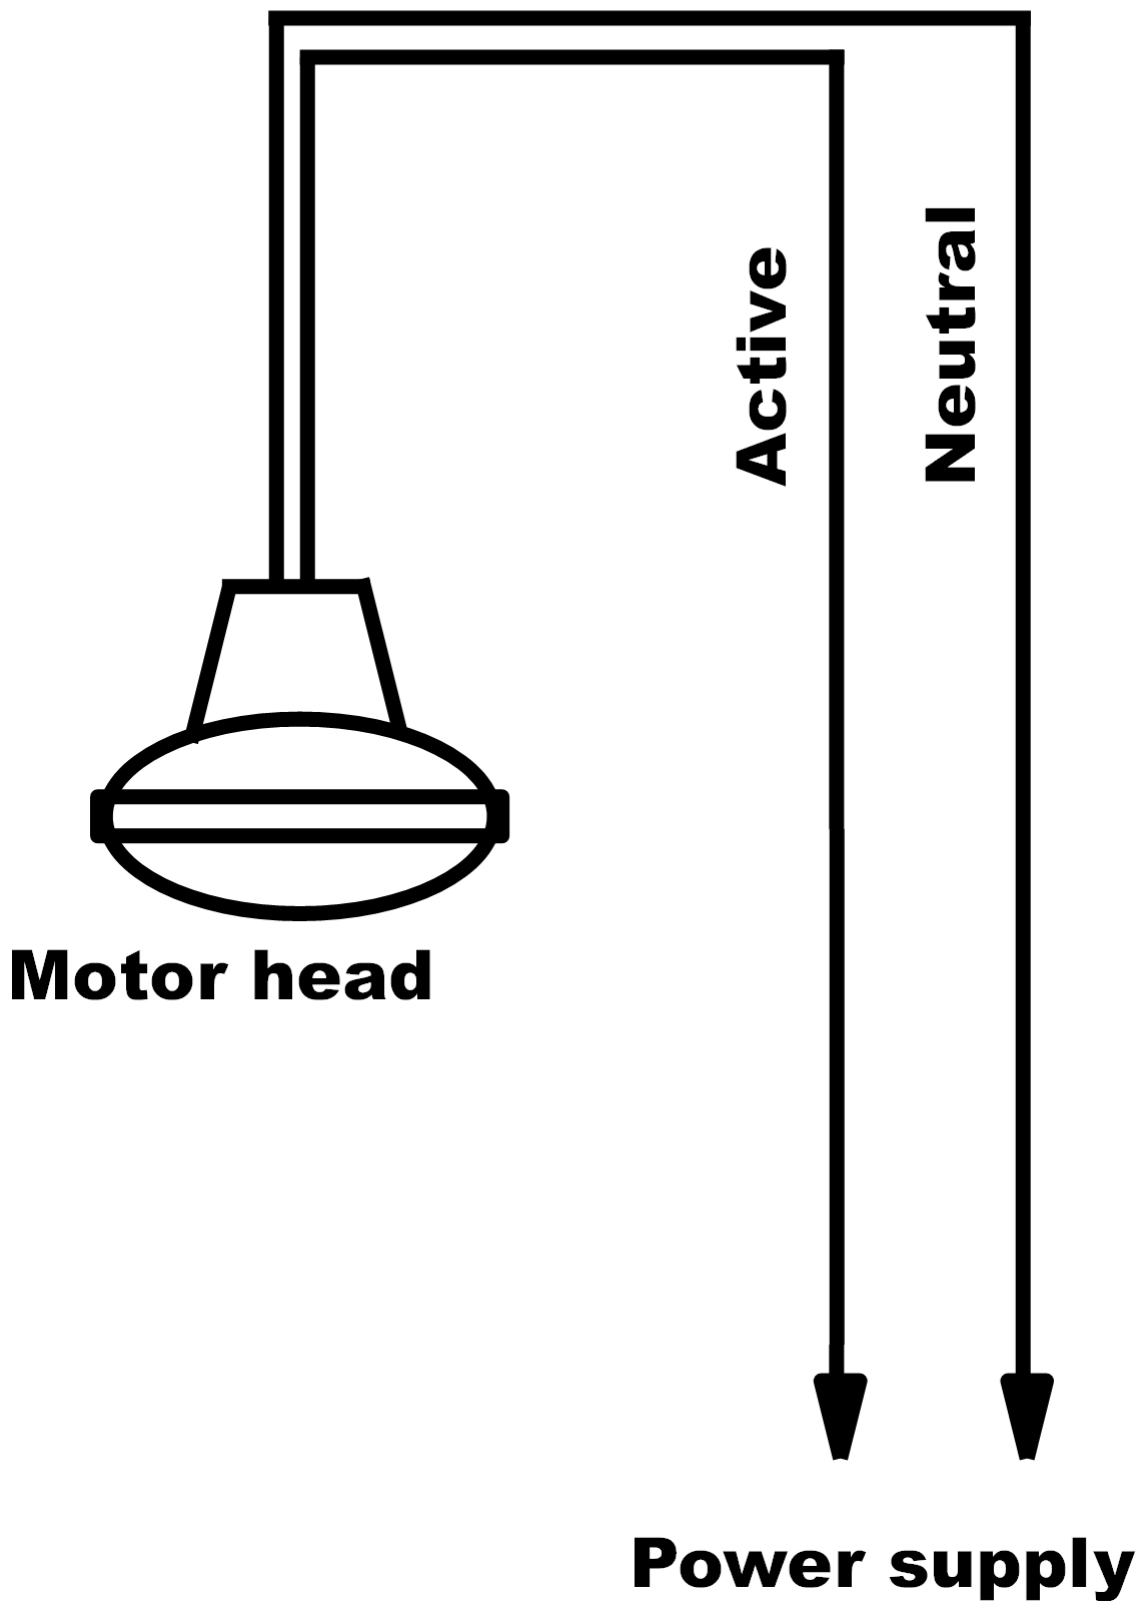

# Fan Control

## Features


- 3 speed controller settings: High, medium and low
- Voltage: 220-240V a.c.
- Power: 65W
- For use with QXH sweep fan models

## For FC-48A / FC-56A

Step 1: Connect the receiver to the host; match the MARKS to connect.

Step 2: Fix the RC holder on the wall (using screws or double-sided tape), and insert 2pcs of AAA batteries for use.

### The receiver wiring diagram:

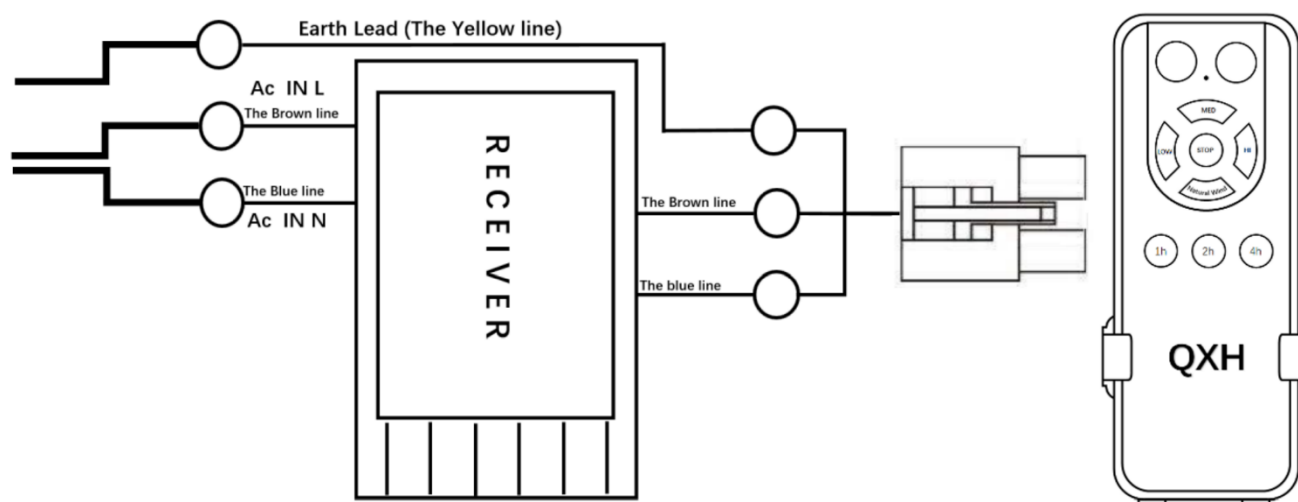

## Warranty

JH MARKET (QXH) warrants this product for a period of 2 years from the date of purchase. These goods come with guarantees that cannot be excluded under the Australian and New Zealand Consumer Laws. You are entitled to a replacement or a refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired if the goods fail to be acceptable quality and the failure does not amount to a major failure.

## Customer Service

<https://jh.market>

