




SHOP SMART. SHOP VALUE
SHOP *differently*



FYT3702 50W / 100W / 150W / 200W LED Floodlight 5000K

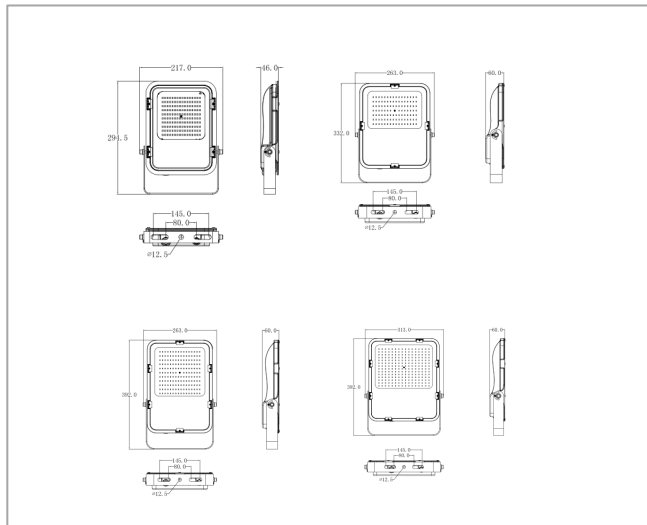

SKU	CS-FYT-3702-50W-5000K	DIMENSION (mm)	295 x 217 x 46
	CS-FYT-3702-100W-5000K		332 x 263 x 60
	CS-FYT-3702-150W-5000K		392 x 263 x 60
	CS-FYT-3702-200W-5000K		392 x 313 x 60
LED	Lightning 2835	DRIVER	Tomcarline
VOLTAGE (V)	AC 200-240V	HOUSING COLOUR	Black
POWER FACTOR (PF)	>0.95	MATERIAL	Aluminum + tempered glass
WATTAGE (W)	50W / 100W / 150W / 200W	IP / IK	IP65 / IK08
FLICKER FREE (Y/N)	YES	OPERATING TEMPERATURE (°C)	-30~ TO +40°C
LUMEN OUTPUT (LM)	6,500 / 13,000 / 19,500 / 26,000	DIMMABLE (Y/N)	NO
EFFICACY (LM/W)	130 LM/W	INSTALLATION TYPE	Surface mount
COLOUR TEMPERATURE (K)	5000K	NET WEIGHT (kg)	2.7 / 3.6 / 4.3 / 5
BEAM ANGLE (°)	120°	LIFESPAN (HOURS)	50,000
CRI (Ra)	>70	WARRANTY (YEARS)	3
SDCM	<5	COMPLIANCE	RCM, SAA



MOORABBIN
131-133 Keys Road
Moorabbin VIC 3189

ALTONA
1 Drake Boulevard
Altona VIC 3018

EPPING
103 Gateway Blvd
Epping VIC 3076

ALBION
35 Sandgate Road
Albion QLD 4010

AUCKLAND
10 Fairfax Avenue, Penrose
Auckland 1061, New Zealand

sales@jh.market
www.jh.market
sales@jhmarket.co.nz
jhmarket.co.nz

AU National: 1300 000 808
Queensland: 1300 000 707
NZ National: 0800 748 848

Yiyun Corporation Pty Ltd | All information in this catalogue is subject to change at business discretion.
Please contact the office for confirmation of pricing and stock availability at time of order