



SHOP SMART. SHOP VALUE
SHOP *differently*



Product Description/Introduction

VTYH101201 9W SOLAR FLOOD LIGHT, capable of sensing human activity in the dark outdoors, are automatically switched on, providing additional safety and security for your home.

Product Key Features/Selling Points

- Wide application: IP65 outdoor solar flood light, suitable for garden, swimming pool, fence, courtyard, driveway, stairs, external wall, etc., heat resistant, weatherproof, no need to worry about outdoor damage.
- Motion Sensor & Light Sensor Modes: Led solar flood lights dusk to dawn, It will automatically switch to highlight mode when it detects an object moving. Solar floodlights outdoor can keep your house secure when strangers approach. Maximum power saving.
- Remote Control: This solar powered light is controlled by high power remote control and the remote control distance up to 5-8m, for auto modes, gradient mode, full bright mode, half bright mode, 3/5/8 hours timing mode.
- 0 Electricity Bill: No electricity cost, entirely solar powered and wireless installation, which can save your cost.



MOORABBIN

131-133 Keys Road
Moorabbin VIC 3189

ALTONA

1 Drake Boulevard
Altona VIC 3018

ALBION

35 Sandgate Road
Albion QLD 4010

AUCKLAND

10 Fairfax Avenue, Penrose
Auckland 1061, New Zealand

sales@jh.market

www.jh.market

sales@jhmarket.co.nz
jhmarket.co.nz

AU National: 1300 000 808


Queensland: 1300 000 707

NZ National: 0800 748 848

Yiyun Corporation Pty Ltd | All information in this catalogue is subject to change at business discretion.

Please contact the office for confirmation of pricing and stock availability at time of order

Vertex 9W Solar Panle Floodlight

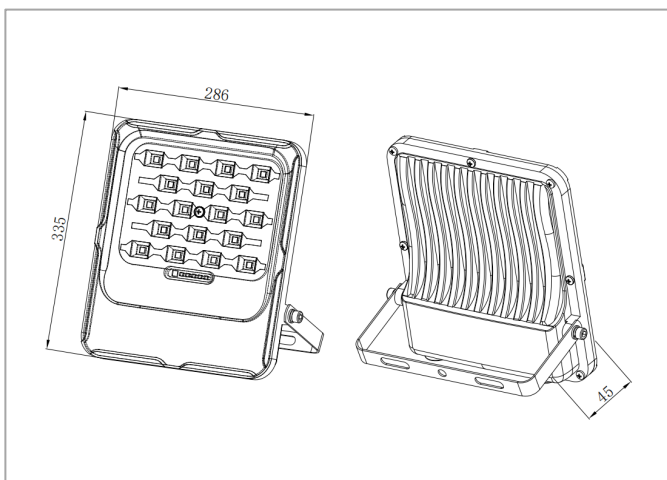

MODEL (JH SKU CODE ONLY)	CS-OP-VTYH101201-9W	UGR	/
INPUT VOLTAGE (V)	3.2V	HOUSING COLOUR	Sandy Gray
PROTECTION CLASS	/	MATERIAL	Die Casting Aluminum+pc
IC-4 RATED (Y/N)	/	IP	IP65
POWER FACTOR (PF)	/	OPERATING TEMPERATURE (°C)	
WATTAGE (W)	9W	DIMMABLE (Y/N)	
FLICKER FREE (Y/N)	Y	DIMMING TYPE	
LUMEN OUTPUT (LM)	990LM	CUT-OUT (mm)	/
EFFICACY (LM/W)	100 LM/W	DIMENSION (mm)	286*45*335mm
COLOUR TEMPERATURE (K)	6000-7000K	NET WEIGHT (kg)	3.6kg
BEAM ANGLE (°)	110°	LIFE SPAN	
CRI (Ra)	>70	WARRANTY	2years
SDCM	/	COMPLIANCE	