


LiteLighting 10W LED Downlight Tricolour 90mm Cut-out V6

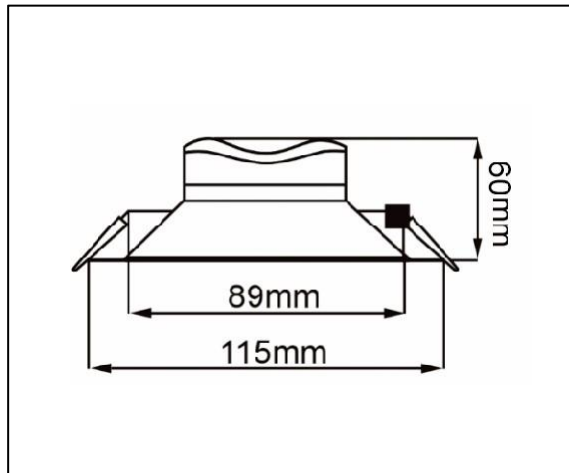

MODEL	LL-FDL6-P9010D-CCT	HOUSING COLOUR	White
INPUT VOLTAGE (V)	AC 220-240V	MATERIAL	Conduction material + aluminum
PROTECTION CLASS	II	IP	44
SPD (KV)	1.5	OPERATING TEMPERATURE (°C)	-20°C to +45°C
POWER FACTOR (PF)	0.9	DIMMABLE (Y/N)	Y
WATTAGE (W)	10	DIMMING TYPE	TRIAC DIMMING
LUMEN OUTPUT (LM)	800-950	INSTALLATION TYPE	RECESSED
EFFICACY (LM/W)	80-95	CUT-OUT (mm)	Φ90
COLOUR TEMPERATURE (K)	Tricolour: 3000-4000-6000	DIMENSION (mm)	Φ115*60
BEAM ANGLE (°)	100	NET WEIGHT (kg)	0.17
CRI (Ra)	>80	LIFESPAN (hr.) @L70B50	30,000
SDCM	<5	WARRANTY (yr.)	3