


LiteLighting Highbay 200W 90D 5000K

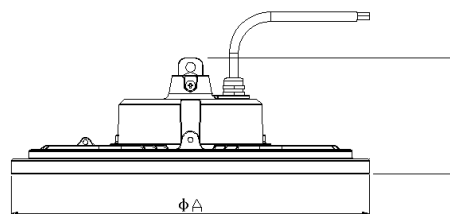

LL-HB07 Dimension list

SKU	Power (W)	A	B	C	D
LL-HB07-100W-90-5000K	100	290	119	410	205
LL-HB07-150W-90-5000K	150	350	119	444	205
LL-HB07-200W-90-5000K	200	380	119	460	205

SKU	LL-HB07-200W-90-5000K	HOUSING COLOUR	Black
INPUT VOLTAGE (V)	AC 180-264VAC, 50/60Hz	MATERIAL	die-casting aluminium+PC
PROTECTION CLASS	I	IP	IP65
SDCM	<6	OPERATING TEMPERATURE	-25°C to +45°C
SPD (KV)	L/N-PE:4KV, L-N:3KV	DIMMABLE (Y/N)	N
POWER FACTOR (PF)	>0.9	CRI (Ra)	>80
WATTAGE (W)	200W	INSTALLATION TYPE	Hanging installation
LUMEN OUTPUT (LM)	26,000LM	BEAM ANGLE	90
EFFICACY (LM/W)	130LM/W	DIMENSION (mm)	380mm x 119mm
COLOUR TEMPERATURE (K)	5000K	NET WEIGHT (kg)	3 kg
LIFESPAN(hr.)@L70B50	50,000	WARRANTY (yr.)	5