




SHOP SMART. SHOP VALUE  
SHOP *differently*



## Rafe 40W Track Light White

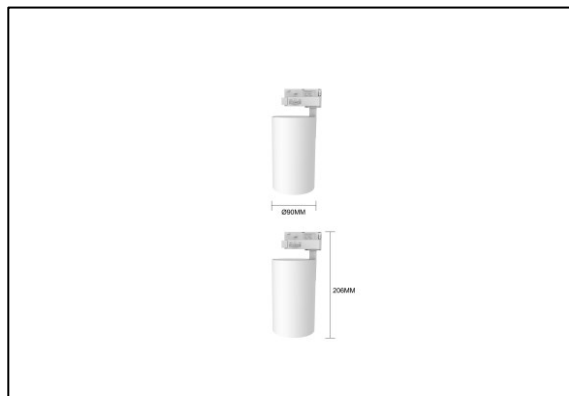

|                        |                                                                                                                |                            |                                      |
|------------------------|----------------------------------------------------------------------------------------------------------------|----------------------------|--------------------------------------|
| MODEL                  | CS-CGD-LR1023R-01-40W-3000K-38D-WH<br>CS-CGD-LR1023R-01-40W-4000K-38D-WH<br>CS-CGD-LR1023R-01-40W-5000K-38D-WH | SDCM                       | <6                                   |
| LED BRAND              | Bridgelux                                                                                                      | UGR                        | <19                                  |
| INPUT VOLTAGE (V)      | 220-240V                                                                                                       | HOUSING COLOUR             | WHITE                                |
| PROTECTION CALSS       | CLASS I                                                                                                        | MATERIAL                   | ALUMINUM                             |
| IC-4 RATED (Y/N)       | YES                                                                                                            | IP                         | 20                                   |
| POWER FACTOR (PF)      | 0.9                                                                                                            | OPERATING TEMPERATURE (°C) | -20°C to +40°C                       |
| WATTAGE (W)            | 40W                                                                                                            | DIMMABLE (Y/N)             | NO                                   |
| FLICKER FREE (Y/N)     | YES                                                                                                            | DIMMING TYPE               | NA                                   |
| LUMEN OUTPUT (LM)      | 3600LM                                                                                                         | INSTALLATION TYPE          | 3 PHASE 3 CIRCUIT<br>UNIVERSAL TRACK |
| EFFICACY (LM/W)        | 90LM/W                                                                                                         | CUT-OUT (mm)               | 90mm                                 |
| COLOUR TEMPERATURE (K) | 3000K / 4000K / 5000K                                                                                          | DIMENSION (mm)             | SEE DIMENSION DRAWING                |
| BEAM ANGLE (°)         | 38°                                                                                                            | NET WEIGHT (kg)            | 0.9kg                                |
| ANGLE OF ROTATION      | 350° HORIZONTALLY ROTATION,<br>45° DOWNWARDS and 18° UPWARDS                                                   | LIFESPAN (hr.)<br>@L70B50  | 50,000 HR                            |
| CRI (Ra)               | 90                                                                                                             | WARRANTY (yr.)             | 3 YEARS                              |
| SDCM                   | <6                                                                                                             | COMPLIANCE                 | SAA                                  |



**MOORABBIN**  
131-133 Keys Road  
Moorabbin VIC 3189

**ALTONA**  
1 Drake Boulevard  
Altona VIC 3018

**ALBION**  
35 Sandgate Road  
Albion QLD 4010

**AUCKLAND**  
10 Fairfax Avenue, Penrose  
Auckland 1061, New Zealand

sales@jh.market  
www.jh.market  
sales@jhmarket.co.nz  
jhmarket.co.nz

AU National: 1300 000 808  
Queensland: 1300 000 707  
NZ National: 0800 748 848

Yiyun Corporation Pty Ltd | All information in this catalogue is subject to change at business discretion.  
Please contact the office for confirmation of pricing and stock availability at time of order